

LP GAS: AN ENERGY SOLUTION FOR A LOW CARBON WORLD

*A COMPARATIVE ANALYSIS DEMONSTRATING THE GREENHOUSE GAS
REDUCTION POTENTIAL OF LP GAS IN DOMESTIC APPLICATIONS*

FOREWORD BY THE WORLD LP GAS ASSOCIATION (WLPGA)

Energy is essential for economic and social development yet for all the invaluable benefits that energy access brings, its consumption can have a negative effect on the environment, particularly with regard to climate change. However not all kinds of energy have the same impact on our climate. It is therefore important that consumers are informed and able to choose clean energy sources. This study, conducted in accordance with the Intergovernmental Panel on Climate Change (IPCC) methodologies, demonstrates that compared to many other energy sources, Liquefied Petroleum Gas (LP Gas) can help minimize greenhouse gas (GHG) emissions and therefore mitigate climate change in many applications and regions around the world today.

LP Gas is a clean-burning and efficient fuel. It is also a vital source of energy for hundreds of millions of people throughout the world today. It is a modern and safe energy providing heat and power to both urban and rural consumers. LP Gas can be used anywhere and is available now without large investments in technology and infrastructure. It is a multi-purpose energy with literally thousands of applications. It is portable; can be transported, stored and used virtually anywhere in the world and there are sufficient reserves to last for many decades. Importantly, and as this study shows, LP Gas demonstrates lower GHG emissions than petrol, diesel, and electricity, on an energy-equivalent basis.

The World LP Gas Association (WLPGA) is the global voice of the LP Gas industry. Granted, consultative Status with the United Nations Economic and Social Council in 1989, the WLPGA promotes the use of LP Gas worldwide to help foster a cleaner, healthier and more prosperous world.

ACKNOWLEDGEMENTS

This report was developed with the support of the following WLPGA members who generously shared their time, talent and wisdom.

Makoto Arahata	Japan LP Gas Association
Kimball Chen	Energy Transportation Group
Arnaud Duviolguerbigny	AEGPL
Mauricio Jarovsky	Ultragaz
Jin-Sung Jung	Korea LPG Association
Greg Kerr	PERC
Ian Maloney	ELGAS
Sunil Mathur	Indian Oil Corporation

This study was prepared by Energetics Incorporated. Matt Antes, Ross Brindle, Joe McGervey, Kristian Kiuru, Mike Lloyd, Matt Munderville, Lindsay Pack, and Beth Zotter, all with Energetics, are the principal authors of this report.

Michael Kelly of WLPGA coordinated this project.



TABLE OF CONTENTS

OVERVIEW	5
LP GAS AND CLIMATE CHANGE	14
ABOUT GREENHOUSE GAS EMISSION FROM FUEL COMBUSTION.....	14
METHODOLOGY FOR APPLICATION SPECIFIC EMISSIONS RESULTS.....	18
SUMMARY OF FINDINGS	
Cooking.....	23
Distributed Power Generation.....	27
Residential Space Heating.....	29
Residential Water Heating – Central.....	32
Residential Water Heating – Point-of-Use.....	34
APPLICATION-SPECIFIC ANALYSES	
Cooking.....	36
Distributed Power Generation.....	39
Residential Space Heating.....	41
Residential Water Heating	44
APPENDIX – ASSUMPTIONS AND REFERENCES	47
LIST OF ACRONYMS.....	55
GLOSSARY OF TERMS.....	56
ABOUT THE WORLD LP GAS ASSOCIATION	62

OVERVIEW

Greenhouse gas (GHG) emissions and global climate change are receiving increased attention from every level of the global community – scientists, politicians, policy makers, business executives, media, and consumers. Businesses and governments around the world are devising workable options in order to address the issue. The purpose of this study is to inform worldwide energy stakeholders such as the LP Gas industry, policymakers, senior decision makers, and other interested parties about the GHG emissions profile of LP Gas as they make important decisions regarding emissions reduction strategies.

The study quantifies the GHG emissions for LP Gas and other competing energy sources like oil, petrol, diesel, and electricity in four applications in seven regions of the world: Western Europe, Eastern Europe, India, Japan, North America, the Republic of Korea, and South America. The four applications selected are important and representative of the global LP Gas industry: cooking, distributed power generation, residential space heating, and residential water heating.

The methodology used to carry out this study takes into account energy consumption rates, emissions factors, and equipment efficiencies for each application and estimates GHG emissions associated with the use of LP Gas and competing energy sources in each region (“end-use emissions”). It also considers the GHG emissions generated during the production and transportation of each energy source from its origins to the point of use (“upstream emissions”). By combining end-use and upstream emissions, it estimates the total GHG emissions associated with the use of each fuel analyzed. To facilitate easy comparison across energy options, all results are normalized to the emissions generated using LP Gas. Regional differences in electricity generation sources and equipment *configurations* create significant differences in the relative GHG emissions profile for LP Gas and other fuels for each application. The results of this study are summarized in Tables ES-1 through ES-7.

The study remains consistent with the scientific conventions for carbon accounting developed by the Intergovernmental Panel on Climate Change (IPCC).¹ These widely accepted conventions include the use of global warming potential factors for greenhouse gas compounds, allocating upstream carbon credits for biomass fuel sources, and reporting GHG emissions in terms of CO₂-equivalent units. The IPCC was founded to assess on a comprehensive, objective, open, and transparent basis the latest scientific, technical and socio-economic literature produced worldwide relevant to the understanding of the risk of human-induced climate change, its observed and projected impacts, and options for adaptation and mitigation.

LP Gas is primarily a combination of propane and butane molecules, along with trace amounts of other compounds; the exact composition varies around the world. Propane, n-butane, and iso-butane are not direct GHGs when released into the air. LP Gas vapor is not persistent in the atmosphere—it is commonly removed by natural oxidation in the presence of sunlight or knocked down by precipitation faster than it takes for it to become well-mixed and have impacts on global climate. Current measurements have not found a global climate impact from the emissions of propane or butanes.

The IPCC reports that “Given their short lifetimes and geographically varying sources, it is not possible to derive a global atmospheric burden or mean abundance for most volatile organic compounds (VOCs) from current measurements.” VOCs explicitly include propane and butanes (IPCC TAR 2001).

¹ The IPCC is a scientific intergovernmental body set up by the World Meteorological Organization (WMO) and by the United Nations Environment Programme (UNEP). Because of its intergovernmental nature, the IPCC is able to provide scientific technical and socio-economic information in a policy-relevant but policy neutral way to decision makers. When governments accept the IPCC reports and approve their Summary for Policymakers, they acknowledge the legitimacy of their scientific content.

KEY FINDINGS

The findings of this study clearly demonstrate that LP Gas has an important role to play as global decision-makers seek to address climate change by reducing GHG emissions. Indeed, in many applications and regions LP Gas is among the most attractive energy options for minimizing GHG emissions.

- **Cooking**—LP Gas is among the lowest carbon-emitting fuel sources for cooking in many regions of the world. In India, for example, LP Gas emits 60% fewer GHGs than electric coil cook tops, 50% fewer emissions than some biomass stoves, and 19% fewer GHGs than kerosene stoves.
- **Distributed Power Generation**—LP Gas offers lower GHG emissions than diesel generators in every region and for every generator size considered in this study. In regions that rely heavily on liquid natural gas (LNG) such as Japan and the Republic of Korea, LP Gas even out-performs natural gas generators. When factoring in ease of transport in the absence of natural gas distribution infrastructure, it is clear that, from a GHG emissions perspective, LP Gas is the best choice for distributed power generation.
- **Residential Space Heating**—When heating a home, LP Gas helps consumers significantly reduce their carbon footprints. In Europe, LP Gas offers 15% lower GHG emissions than heating using fuel oil. LP Gas's advantage over electricity is even more dramatic: 30% lower GHG emission in South America, 35% lower in Japan, 38% lower in the Republic of Korea, and up to 54% lower in North America.
- **Residential Water Heating**—LP Gas is also among the most attractive fuels for heating water. In South America, an LP Gas instant water heater with electronic ignition offers 14% lower GHG emissions than an electric storage water heater. In Japan, switching from fuel oil to LP Gas can lower GHG emissions by 15%. In North America, upgrading from an electric storage water heater to an LP Gas system can reduce GHG emissions by more than 35%. In India, using an LP Gas instant water heater instead of comparable electric units can lower GHG emissions by more than 50%. Finally, pumped solar water heating with an LP Gas instant water heater backup offers the best combination of low GHG emissions and reliability of any hot water supply system assessed in this study.

As global decision makers continue to debate the effects of climate change and seek ways to reduce GHG emissions, LP Gas can offer significant near-term solutions. LP Gas is not only among the most attractive options for reducing GHG emissions, but it is abundantly available today in many parts of the world through existing distribution channels. Switching to LP Gas can help to immediately reduce GHG emissions in many applications and parts of the world. LP Gas also can be easily delivered to developing regions which may not have existing natural gas or electricity distribution infrastructures, offering an immediate, cost-effective, and low-carbon energy solution. When combined with other environmental, cost, and performance advantages, it is clear that LP Gas is an ideal clean energy for a low-carbon world.



TABLE ES-2. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – WESTERN EUROPE

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions^a

Cooking ^b		Distributed Power Generation ^c		Residential Space Heating ^a		Residential Water Heating: Central		Residential Water Heating: Point-of-Use	
Electric Induction	0.73	Natural Gas	0.92	High-efficiency Electric Heat Pump	0.47	Solar, LP Gas Instant Backup	0.44	Electric Instant, Electronic Temperature Control	0.63
Electric Coil	0.83	LP Gas	1.00	High-efficiency Boiler: Natural Gas	0.88	Electric Instant	0.64	Electric Instant, Hydraulic Temperature Control	0.72
High-efficiency Natural Gas	0.88	Diesel	1.08	High-efficiency Boiler: LP Gas	1.00	Natural Gas Instant	0.83	Natural Gas Instant, Electronic Ignition	0.91
High-efficiency LP Gas	1.00			High-efficiency Boiler: Fuel Oil	1.17	Electric Storage	0.84	LP Gas Instant, Electronic Ignition	1.00
				High-efficiency Wood Stove	1.96	Natural Gas Instant Combination Boiler	0.91	Electric Storage	1.02
				High-efficiency Wood Stove w/ Carbon Credit	0.20	LP Gas Instant	0.92		
						LP Gas instant combination boiler	1.00		

Footnotes:

- a Greenhouse gas emissions results for biomass energy sources are presented without and with carbon credits. Explanation presented on page 23.
- b Market data in each region was used to determine which fuels and technologies to include in the analysis.
- c Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.



TABLE ES-1. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – EASTERN EUROPE

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions^a

Cooking ^b		Distributed Power Generation ^c		Residential Space Heating ^a		Residential Water Heating: Central		Residential Water Heating: Point-of-Use	
Conventional Natural Gas	0.88	Natural Gas	0.92	High-efficiency Electric Heat Pump	0.76	Solar, LP Gas Instant Backup	0.47	Natural Gas Instant, Electronic Ignition	0.91
Conventional LP Gas	1.00	LP Gas	1.00	High-efficiency Boiler: Natural Gas	0.88	Natural Gas Instant	0.83	LP Gas Instant, Electronic Ignition	1.00
Electric Coil	1.28	Diesel	1.08	High-efficiency Boiler: LP Gas	1.00	Natural Gas Instant Combination Boiler	0.91	Electric Instant, Electronic Temperature Control	1.03
				High-efficiency Boiler: Fuel Oil	1.17	LP Gas Instant	0.92	Electric Instant, Hydraulic Temperature Control	1.17
				High-efficiency Wood Stove	1.96	Electric Instant, Electronic Temperature Control	0.97	Electric Storage	1.67
				High-efficiency Wood Stove w/ Carbon Credit	0.20	LP Gas Instant Combination Boiler	1.00		
						Electric Instant, Hydraulic Temperature Control	1.12		
						Electric Storage	1.37		

Footnotes:

- a Greenhouse gas emissions results for biomass energy sources are presented without and with carbon credits. Explanation presented on page 23.
- b Market data in each region was used to determine which fuels and technologies to include in the analysis.
- c Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.



TABLE ES-3. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – INDIA

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions^a

Cooking ^{ab}		Distributed Power Generation ^c		Residential Space Heating ^a		Residential Water Heating: Central		Residential Water Heating: Point-of-Use	
LP Gas	1.00	Natural Gas	0.91	LP Gas Space Heater	1.00	Solar, LP Gas Instant Backup	0.28	Natural Gas Instant, Electronic Ignition	0.90
Kerosene	1.23	LP Gas	1.00	Kerosene Space Heater	1.19	Natural Gas Instant, Electric Ignition	0.90	LP Gas Instant, Electronic Ignition	1.00
Wood (ceramic)	2.27	Diesel	1.10	Electric Space Heater	3.86	LP Gas Instant, Electric Ignition	1.00	Electric Instant, Electronic Temperature Control	1.92
Wood (ceramic) w/ Carbon Credit	0.22			Wood Stove	8.19	Natural Gas Instant, Pilot Ignition	1.30	Electric Instant, Hydraulic Temperature Control	2.18
Electric Coil	2.51			Wood Stove w/ Carbon Credit	0.53	LP Gas Instant, Pilot Ignition	1.46	Electric Storage	3.11
Wood (traditional)	3.29								
Wood (traditional) w/ Carbon Credit	0.66								
Crop Residue	5.19								
Crop Residue w/ Carbon Credit	2.01								
Dung Mud Stove	7.57								
Dung Mud Stove w/ Carbon Credit	1.41								

Footnotes:

- a Greenhouse gas emissions results for biomass energy sources are presented without and with carbon credits. Explanation presented on page 23.
- b Market data in each region was used to determine which fuels and technologies to include in the analysis.
- c Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.



TABLE ES-4. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – JAPAN

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions

Cooking ^a		Distributed Power Generation ^b		Residential Space Heating		Residential Water Heating: Central		Residential Water Heating: Point-of-Use	
Electric Induction	0.93	LP Gas	1.00	Natural Gas Direct Vent Heater	0.95	Solar, LP Gas Instant Backup	0.46	Natural Gas Instant Bathtub Heater	0.85
High-efficiency Natural Gas	0.95	Natural Gas	1.00	LP Gas Direct Vent Heater	1.00	Electric Heat Pump	0.63	LP Gas Instant, Bathtub Heater	1.00
High-efficiency LP Gas	1.00	Diesel	1.07	Kerosene Direct Vent Heater	1.14	Natural Gas Instant	0.98	Fuel Oil Instant Bathtub Heater	1.42
				Electric Space Heater	1.53	LP Gas Instant	1.00		
						Fuel Oil Instant	1.17		

Footnotes:

- a Market data in each region was used to determine which fuels and technologies to include in the analysis.
- b Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.



TABLE ES-5. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – NORTH AMERICA

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions^a

Cooking ^b		Distributed Power Generation ^c		Residential Space Heating		Residential Water Heating: Central		Residential Water Heating: Point-of-Use
High-efficiency Natural Gas	0.86	Natural Gas	0.92	High-efficiency Electric Heat Pump	0.73	Natural Gas Instant	0.86	N/A Point-of-use water heating not frequently used in North America
High-efficiency LP Gas	1.00	LP Gas	1.00	High-efficiency furnace: Natural Gas	0.86	Natural Gas Storage	0.88	
Electric Induction	1.07	Diesel	1.07	High-efficiency furnace: LP Gas	1.00	LP Gas Storage	0.99	
Electric Coil	1.22			Furnace: Fuel Oil	1.34	LP Gas Instant	1.00	
				Electric Baseboard	1.83	Electric Storage	1.55	
				Electric Furnace	2.15			

Footnotes:

- a Greenhouse gas emissions results for biomass energy sources are presented without and with carbon credits. Explanation presented on page 23.
- b Market data in each region was used to determine which fuels and technologies to include in the analysis.
- c Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.



TABLE ES-6. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – REPUBLIC OF KOREA

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions

Cooking ^a		Distributed Power Generation ^b		Residential Space Heating		Residential Water Heating: Central		Residential Water Heating: Point-of-Use
Electric Induction	0.91	LP Gas	1.00	High-efficiency Electric Heat Pump	0.63	Solar, LP Gas Instant Backup	0.46	N/A Point-of-use water heating not frequently used in the Republic of Korea
High-efficiency Natural Gas	0.95	Natural Gas	1.02	High-efficiency Heater: Natural Gas	0.95	Natural Gas Instant	0.98	
High-efficiency LP Gas	1.00	Diesel	1.04	High-efficiency Boiler: LP Gas	1.00	LP Gas Instant	1.00	
				High-efficiency Boiler: Fuel Oil	1.20	Fuel Oil Instant	1.17	
				Electric Space Heater	1.61			

Footnotes:

- a Market data in each region was used to determine which fuels and technologies to include in the analysis.
- b Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.



TABLE ES-7. GREENHOUSE GAS EMISSIONS PROFILES: LP GAS AND OTHER ENERGY SOURCES – SOUTH AMERICA

Results normalized to LP Gas GHG emissions per unit of comparison and include both upstream and end-use emissions^a

Cooking ^{ab}		Distributed Power Generation ^c		Residential Space Heating		Residential Water Heating: Central		Residential Water Heating: Point-of-Use	
High-efficiency Natural Gas	0.88	Natural Gas	0.95	High-efficiency Boiler: Natural Gas	0.89	Solar, LP Gas Instant Backup	0.21	Electric Instant, Electronic Temperature Control	0.81
Electric Coil	0.88	LP Gas	1.00	High-efficiency Boiler: LP Gas	1.00	Natural Gas, Instant Electronic Ignition	0.91	Natural Gas Instant, Electronic Ignition	0.91
High-efficiency LP Gas	1.00	Diesel	1.04	High-efficiency Boiler: Fuel Oil	1.21	LP Gas Instant, Electronic Ignition	1.00	Electric Instant, Hydraulic Temperature Control	0.92
Wood	6.61			Electric Space Heater	1.44	Electric Storage	1.16	LP Gas Instant, Electronic Ignition	1.00
Wood w/ Carbon Credit	0.43			Wood Stove	7.37	Natural Gas Instant, Pilot Ignition	1.32	Electric Storage	1.20
				Wood Stove w/ Carbon Credit	0.48	LP Gas Instant, Pilot Ignition	1.46		
				Natural Gas Storage	2.42				

Footnotes:

- a Greenhouse gas emissions results for biomass energy sources are presented without and with carbon credits. Explanation presented on page 23.
- b Market data in each region was used to determine which fuels and technologies to include in the analysis.
- c Distributed power generation emissions profiles vary by equipment size. Data for larger generator sizes is shown on page 45.

LP GAS AND CLIMATE CHANGE

The GHG footprint of LP Gas is relatively small compared to other fuels in terms of total emissions and emissions per unit of energy consumed. LP Gas has the lowest on-site emission rate of the major energy sources, with the exception of natural gas. Furthermore, LP Gas is not a GHG when released into the air as it is primarily a combination of propane and butane molecules, along with trace amounts of other compounds; the exact composition of which varies around the world. LP Gas vapor is not persistent in the atmosphere, it is commonly removed by natural oxidation in the presence of sunlight or knocked down by precipitation faster than it takes for it to become well-mixed and have impacts on global climate. Current measurements have not found a global climate impact from the emissions of propane or butanes.

The Intergovernmental Panel on Climate Change (IPCC) reports that “Given their short lifetimes and geographically varying sources, it is not possible to derive a global atmospheric burden or mean abundance for most volatile organic compounds (VOCs) from current measurements.” VOCs explicitly include propane and butanes (IPCC TAR 2001).

ABOUT GREENHOUSE GAS EMISSIONS FROM FUEL COMBUSTION

The most prevalent greenhouse gas – carbon dioxide (CO₂) – is a necessary byproduct of fossil fuel combustion. The amount of carbon dioxide released during fuel combustion depends on two primary factors: the amount of carbon in the fuel and the amount of fuel consumed to achieve some measure of useful output (e.g., kilometers driven, liters of water heated, etc.).

In general, lighter hydrocarbons release less carbon dioxide during combustion than heavier hydrocarbons, because lighter hydrocarbons consist of fewer carbon atoms per molecule. However, carbon content of the fuel being consumed represents only part of the CO₂ emissions equation. The amount of fuel consumed to achieve a comparable amount of useful output plays an equally important role. Fuel consumption varies by fuel type and technology for each application. For example, while diesel fuel contains more carbon than LP Gas due to its chemical composition, diesel (compression) engines are generally more efficient than spark-ignition engines today. This efficiency advantage offsets some of the GHG emissions disadvantage of diesel compared to other fuels. As the efficiency of spark-ignition engines improve due to advances such as downsizing, turbo charging, and direct injection, the difference in GHG emissions due to differences in efficiency will narrow.

Small amounts of methane (CH₄) and nitrous oxide (N₂O) are also emitted during combustion due to unconsumed fuel. While the amounts of these emissions are far smaller than the amounts of CO₂ emitted, they have been shown to have significantly greater greenhouse effects due to their stability in the atmosphere and their ability to absorb and reflect certain types of solar energy. The IPCC has developed global warming potential factors for these compounds and has advocated the widely accepted convention of reporting GHG emissions in terms of CO₂ equivalent units (IPCC 2007). The global warming potential factors for CO₂, CH₄, and N₂O are 1, 25, and 298, respectively. These factors indicate that one kilogram of methane has 25 times the greenhouse gas effect as one kilogram of CO₂.

UPSTREAM VS. END-USE EMISSIONS

When quantifying the GHG emissions that result from the use of energy, it is important to distinguish between the emissions released at the location where the energy is consumed and the emissions released as a result of extracting and processing a refined and usable energy product to that location. The fuel lifecycle begins where the raw feedstock is extracted from the well or mine and ends where the fuel is consumed to power a vehicle, appliance, or other piece of equipment. Emissions released at the point of use are termed “end-use emissions,” while those emissions that occur along the delivery pathway are termed “upstream emissions.”

Energy use is not the only source of upstream emissions. Other production processes also release GHGs. For example, the growing of crops for biofuels production requires the application of nitrogen fertilizer, which causes the formation of nitrous oxide, while natural gas refining causes the release of fugitive emissions of methane. These processes have been quantified by several available models, including the

Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (GREET) Model, making such models valuable tools for comparative lifecycle analyses of fuel systems (GREET 2007).


This analysis is intended to give a full lifecycle accounting of GHG emissions resulting from the use of LP Gas and other fuels for specific applications and regions.

GREENHOUSE GAS EMISSIONS OF ENERGY SOURCES ON AN ENERGY BASIS


The charts below present the GHG emissions profiles of select energy sources on an equal energy basis, in units of kg CO₂-equivalent per GJ. The energy sources included represent the major fuels that are used in all regions of the world for the applications considered in this analysis. The first chart shown reflects the average GHG emissions per unit of energy across the regions included in this study and is followed by seven regional-specific charts. Regional variations in upstream emissions yield different carbon intensities for each region.

Despite these variations, LP Gas emits fewer GHGs than all energy sources analysed per unit of energy, with the exception of natural gas. This small carbon footprint for LP Gas is an important advantage that should be factored in to energy and climate change policy considerations.

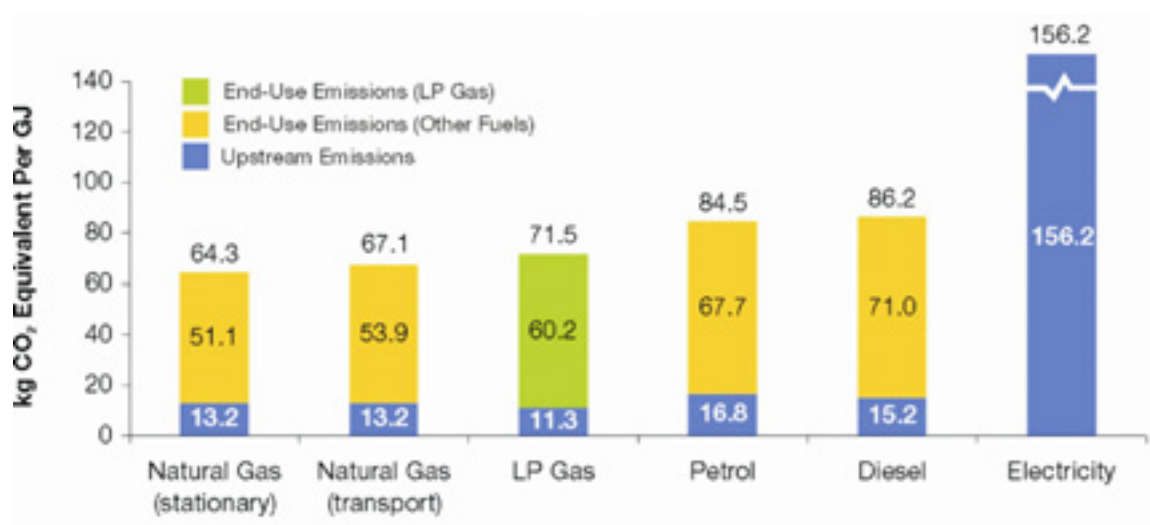
TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: AVERAGE OF REGIONS



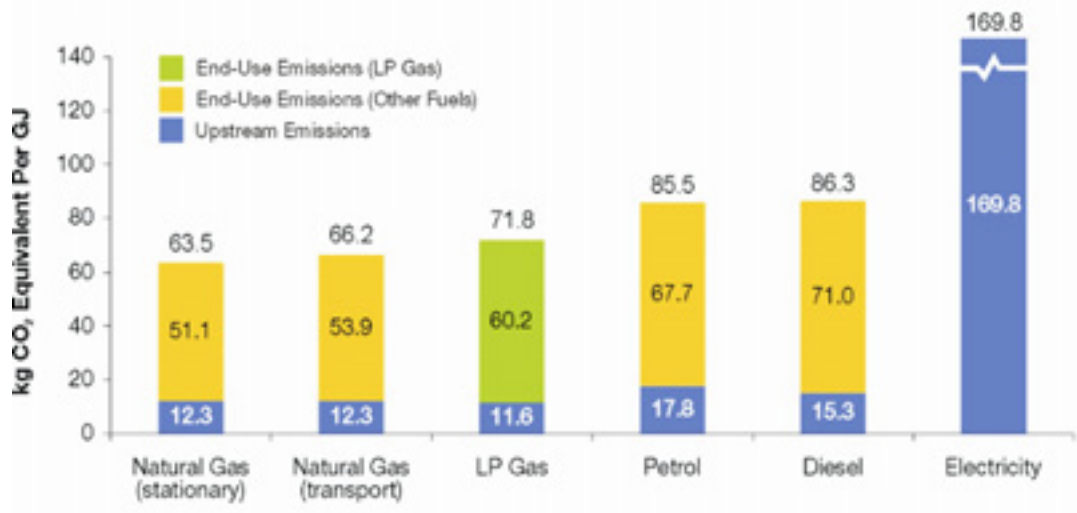
TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: EASTERN EUROPE



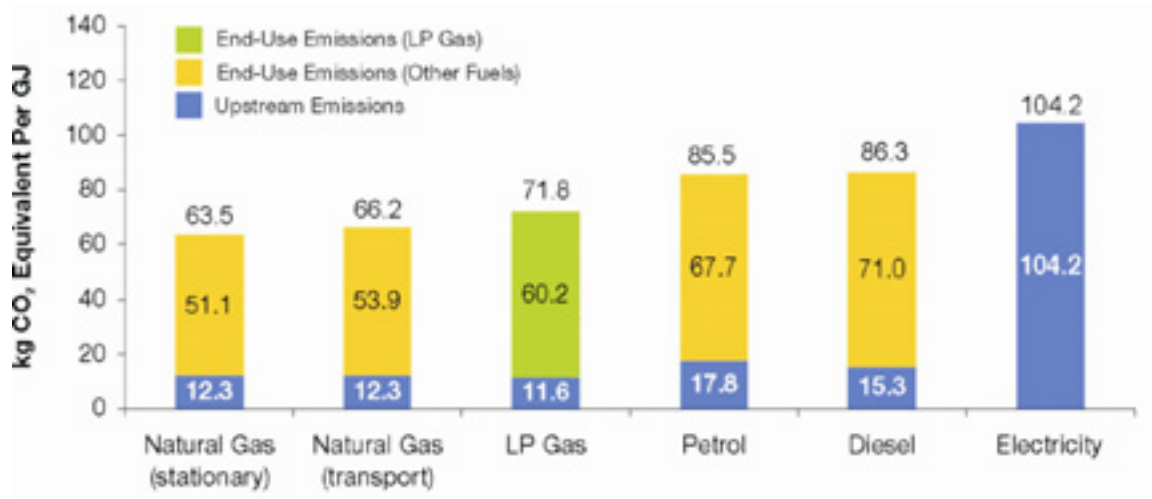
TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: WESTERN EUROPE



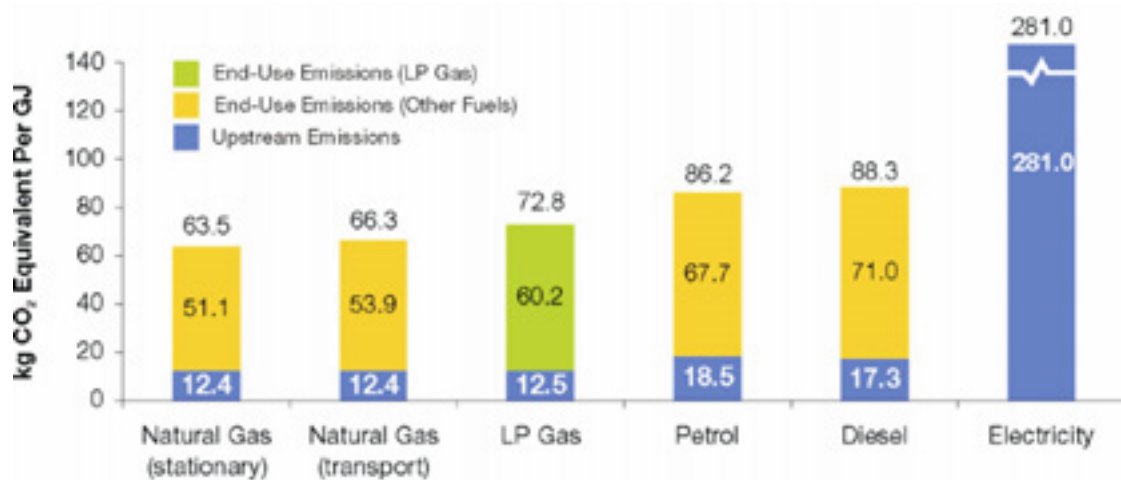
TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: INDIA



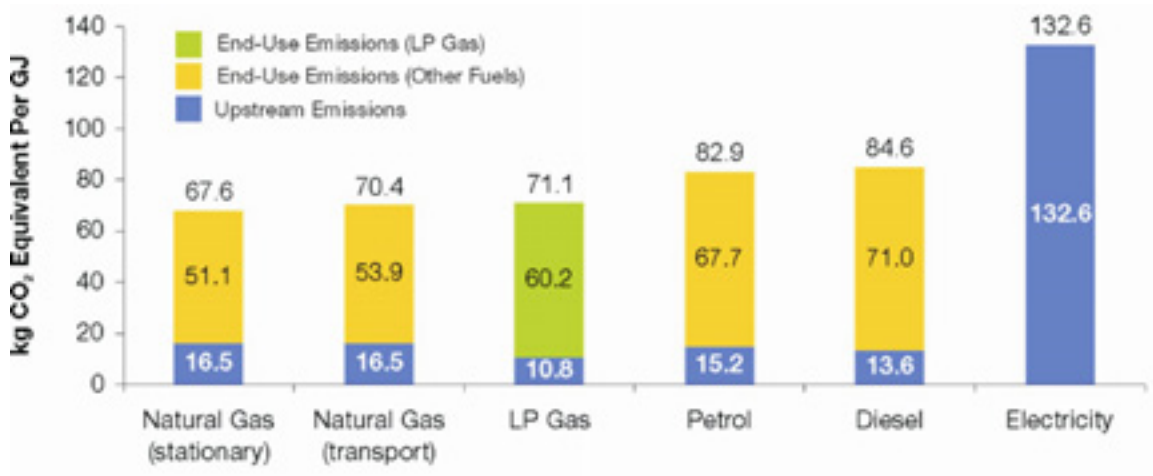
TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: JAPAN



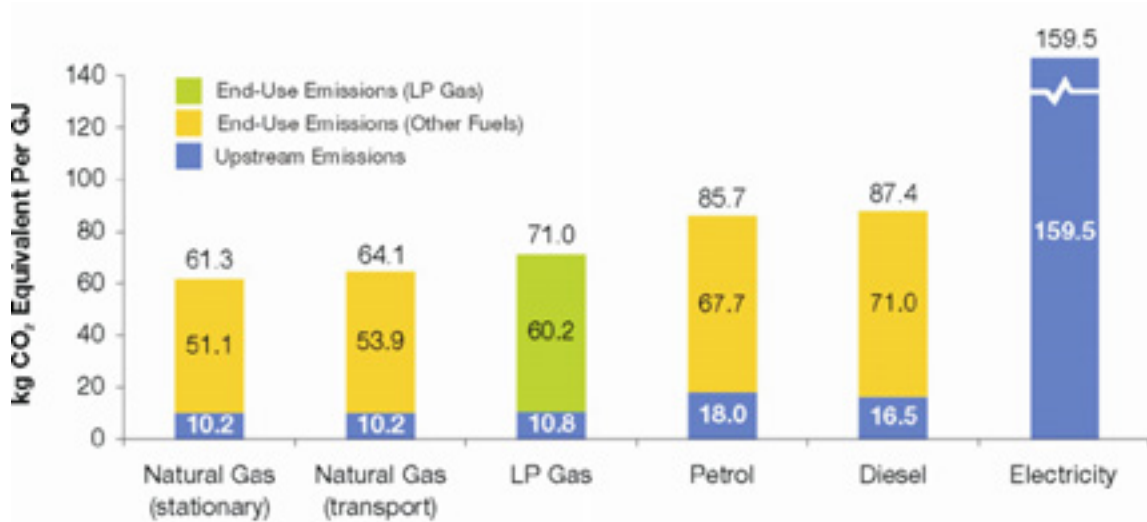
TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: NORTH AMERICA



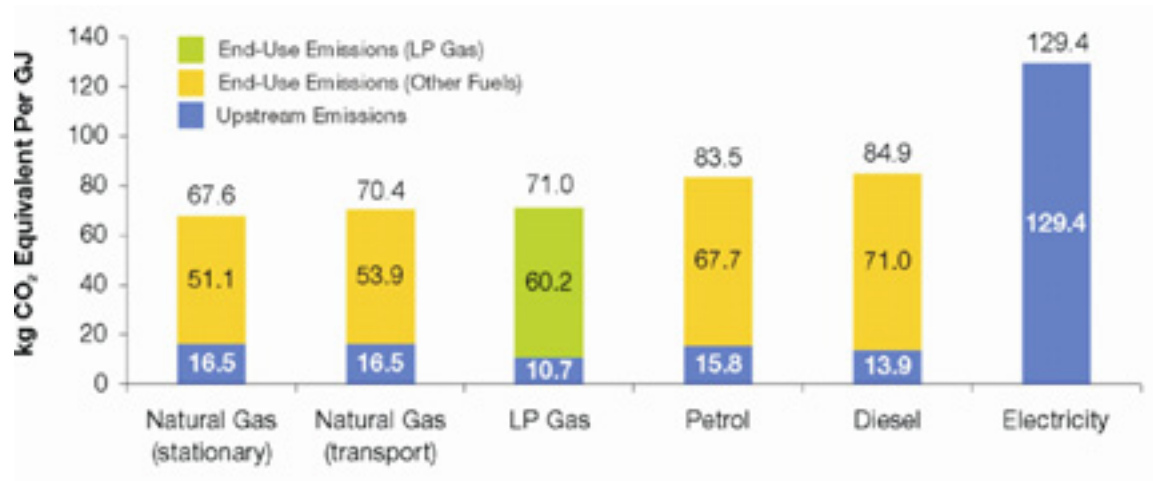TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: REPUBLIC OF KOREA



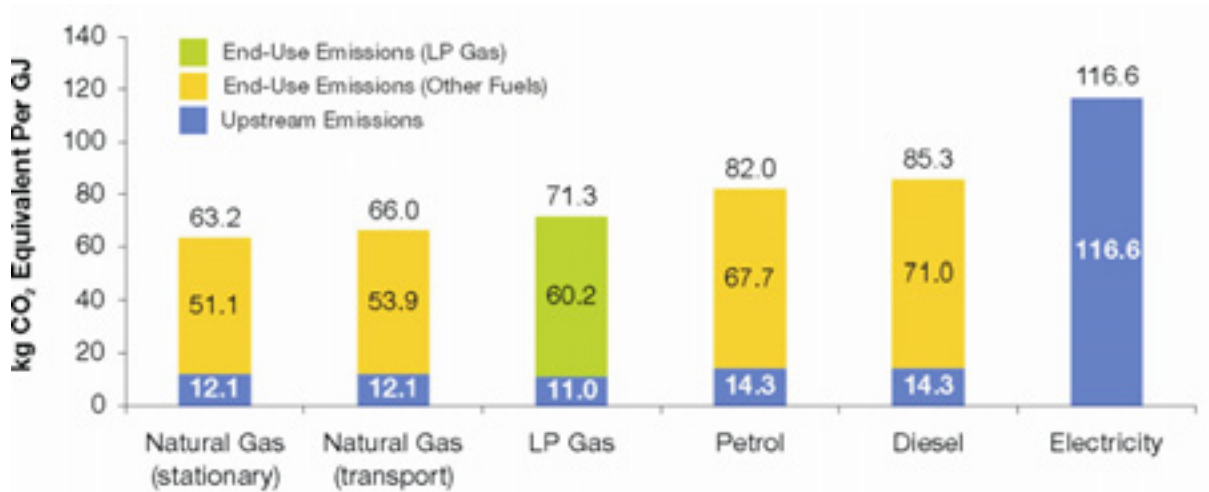TOTAL CARBON EMISSIONS FOR VARIOUS ENERGY SOURCES: SOUTH AMERICA



METHODOLOGY FOR APPLICATION-SPECIFIC EMISSIONS RESULTS

The following describes the basic methodology used to determine the greenhouse gas emissions profile for all applications in all of the regions examined in this study. For application-specific assumptions, please see the Appendix. The overall methodology used in this analysis is similar to that used in the study, *Propane Reduces Greenhouse Gas Emissions: A Comparative Analysis*, published by the U.S. Propane Education & Research Council (Energetics, 2007).

BASIS OF COMPARISON

This study examined five different applications important to the global LP Gas industry in seven different regions of the world. For each application, the study compared LP Gas -fueled equipment to that fueled or powered by other energy sources. To create a meaningful basis for comparison of relative GHG emissions profiles of LP Gas and other fuels, analysts defined a base case for each application. Each base case and the rationale used to determine it are described below:

- **Cooking** – This analysis compares the relative greenhouse gas emissions from heating food in a pot on a stovetop. This application is sufficiently generic to allow the comparison of a wide range of stovetop cookers. Other cooking technologies, including ovens, microwave ovens, toasters, griddles, and traditional “three stone” arrangements were not included in this analysis.
- **Distributed Power Generation** – This analysis calculated energy use based on manufacturer specifications (specs) for power-only (i.e., no combined heat and power) generator sets, or “gensets,” operating at 1,800 rpm for 60 Hz output and at 1,500 rpm for 50 Hz output and 100% nameplate load. The study analyzed manufacturing specs from more than 150 commercially available units that contained adequate data and were available in the regions analyzed (see the Appendix for a full list of manufactures and models analyzed). Statistical log-linear regression of genset data of a given power frequency and size were used to estimate energy end use. Gensets fuel usage for North America, South America, and Korea are based on 60 Hz power. Europe, India, and Japan are based on 50 Hz power. The analysis considers a range of sizes of generators used for both prime and standby use.
- **Residential Space Heating** – To make a fair comparison of LP Gas -fueled and competing space heating technology, we chose to compare the most efficient units commercially available for all fuels, reflecting the “best-in-class” technologies available in each region. The basis for analysis was the energy required to heat a typical home or room in the region for one year. The analysis reflected the differences in technologies used in each region. These differences are driven by government regulations, climate, availability of fuels, and the cost of various technology options.

- **Residential Water Heating** – While there is substantial regional variation in both water heating technologies and their application, all regions tend to rely on central and/or point-of-use systems for their water heating needs. Central residential water heating heats all of a household’s water from one source, while point-of-use heaters are used to heat water for independent needs like dishwashing, hand washing, and showering. This study analyzes both central and point-of-use water heaters on the basis of the amount of energy typically used by in one year.

The study compares LP Gas fueled technology to equipment fueled by other energy sources commonly used for the same application. The study selected operational variables such as size, hours of operation, and frequency of use to represent an average or typical use of the technology or equipment. Analysts obtained data from published test results, vendor-supplied specifications, and government studies to determine what constituted a typical use and energy efficiencies of each fuel system. For most applications, the efficiencies were used to determine the amount of fuel needed to deliver an equivalent energy service (e.g., kilometers traveled or heat supplied) using LP Gas and each competing energy option. For some energy sources, such as electricity or diesel, differences in energy efficiencies between LP Gas and the other fuel are the result of different technology designs. In other instances (most notably natural gas), there are only slight differences in technology design between the LP Gas -configured technology and alternate fuel configurations.

Available equipment configurations can vary significantly across regions in applications considered. Therefore, the study attempted to analyze the range of technologies used in a given region. However, comparisons of the relative GHG emissions profiles of LP Gas versus other fuels across regions in one application may be misleading.

UPSTREAM EMISSIONS

Upstream emissions as defined in this analysis are the sum of all emissions resulting from the recovery, processing, and transport of fuel from the wellhead to the point of delivery to the end-user. Upstream emission factors vary depending on the type, fractional share, and efficiency of power plants used to generate electricity; market shares of different fuel formulations; fuel feedstock shares and refining efficiencies; and fuel transportation mode, distance, and mode share.

The upstream emissions associated with LP Gas production depend on its feedstock. LP Gas is separated from natural gas during production and from crude oil during refining. Upstream emissions calculations attribute to LP Gas, on a MJ-fractional basis², the emissions produced from the recovery and refining of these feedstocks before the separation of LP Gas.³ As a result, the upstream emissions attributed to LP Gas depend on the relative contribution of natural gas and crude oil to LP Gas production and the amount of LP Gas and natural gas imported.

The differences among regions in fuels used to generate electricity have a significant impact on the upstream emissions associated with electricity. For example, electricity in North America, where coal-based electricity generation is significant, has a higher “carbon footprint” than an equivalent amount of electricity generated in South America, where hydropower (which produces minimal GHG emissions) is a higher percentage of the overall electricity generation mix. Similarly, because liquefied natural gas (LNG) requires significant energy to produce and ship via tanker, the relative percentage of natural gas imported via pipeline versus that imported as LNG is reflected in the upstream emissions factors for regions in which LNG plays a significant role in the region’s energy mix.

There are several models that attempt to quantify these emissions, including:

- E3 database – *Ludwig-Bölkow-Systemtechnik GmbH (LBST), Germany*⁴
- GHGenius Model – *Natural Resources Canada, Canada*⁵

² There are several bases on which one can allocate the upstream GHG emissions associated with natural gas processing and petroleum refining to individual product streams, including LP Gas. For this study, analysts use energy content, as opposed to volume, economic value, or other possible metrics. Accordingly, the proportion of the GHG emissions generated during natural gas and crude oil refining are attributed to LP Gas in proportion to its energy content (i.e., the “MJ-fractional basis”), relative to the energy content of all product streams.

³ All products produced from either crude or natural gas are assumed to begin their lifecycle at the wellhead, even though they have not been physically separated from the feedstock. If a given product stream represents 5% of the Btu content of the feedstock, for example, then that product is assigned 5% of the emissions attributed to the feedstock before refining and separation. This method of assigning emissions is not influenced by the economic value of the product or feedstock.

⁴ <http://www.e3database.com/>

⁵ <http://www.ghgenius.ca/>

-
- Global Emission Model for Integrated Systems (GEMIS) – *Öko-Institut (Institute for Applied Ecology), Germany*⁶
 - Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (GREET) Model – *Argonne National Laboratory, United States*⁷







To estimate upstream emissions factors, the study modified the GREET model to reflect regional-specific variations in technology, resource characteristics, operational efficiency, and infrastructure of the region being modeled. See page 53 in the Appendix for a detailed explanation of the assumptions used in this analysis.

A NOTE ON BIOMASS AND CARBON ACCOUNTING

Biomass energy sources receive special consideration when estimating GHG emissions, according to accounting conventions approved by the IPCC and broadly accepted by scientists. These conventions attempt to account for the CO₂ removed from the atmosphere by plants as they grow by giving biomass sources a negative CO₂ upstream emissions factor (see Ethanol column in Table 1). Therefore, while the end-use GHG emissions generated by the use of bio-based fuels can be significant, these emissions are largely offset by upstream credits per this accounting convention. Whether biomass is harvested in a sustainable manner plays a complex role in total GHG emissions and climate change. Quantifying the precise nature of the climate impacts of sustainable versus unsustainable biomass collection is a matter of significant debate and scientific uncertainty. Accordingly, in this report analysts remain consistent with IPCC conventions regarding biomass carbon accounting but also present GHG emissions profiles without carbon credits for biomass carbon uptake in end-use applications. In the global regions where significant deforestation and other unsustainable biomass harvesting approaches occur, the precise GHG emissions profile of biomass is likely between the two extreme values presented here.

<http://www.oeko.de/service/gemis/en/index.htm>
<http://www.transportation.anl.gov/software/GREET/>

TABLE 1. UPSTREAM EMISSIONS FACTORS (KG PER TJ FUEL, GROSS CALORIFIC VALUE)

		Fuel Consumed in Region					Fuel Source (LP Gas and Natural Gas)						
		LP Gas	Natural Gas	Gasoline	Diesel	Electricity ^a	Ethanol ^b	Domestic LP Gas	Imported LP Gas (%)	% LP Gas Imported	Pipeline Natural Gas	Imported Liquid Natural Gas	% Natural Gas Imported as LNG
	CO2	8,374	5,216	14,477	12,093	96,096 (W) 161,301 (E)		8,374	7,207		4,947	11,136	
	CH4	140	283	130	127	290 (W) 305 (E)		129	168		295	335	
	N2O	0.2	0.1	0.3	0.2	2.9 (W) 3.1 (E)		0.2	0.1		0.1	0.3	
	Total	11,593	12,330	17,808	15,334	169,828 (E)		11,653	11,444	29%	12,357.7	19,591.2	9%
	CO2	8,450	5,776	13,888	13,225	270,318		9,276	7,470		5,026	11,306	
	CH4	160	263	169	161	385		172	158		278	276	
	N2O	0.2	0.1	1.4	0.2	3.6		0.2	0.1		0.1	0.3	
	Total	12,507	12,387	18,530	17,326	281,025		13,630	11,461	20%	12,003	18,272	17%
	CO2	7,338	10,551	12,149	10,917	124,674		7,773	7,731			10,551	
	CH4	138	235	114	106	284		107	158			235	
	N2O	0.1	0.2	0.6	0.2	2.8		0.1	0.1			0.2	
	Total	10,828	16,506	15,166	13,626	132,615		10,500	11,732	75%		16,506	100%
	CO2	7,602	4,746	14,000	12,780	151,744	-9,744						
	CH4	125	217	149	144	276	113						
	N2O	0.1	0.1	1.0	0.2	2.9	25						
	Total	10,780	10,196	18,009	16,462	159,513	655						
	CO2	7,441	10,537	12,582	11,146	121,555		8,023	7,731			10,537	
	CH4	131	235	121	107	281		108	158			235	
	N2O	0.1	0.2	0.6	0.2	2.8		0.1	0.1			0.2	
	Total	10,747	16,491	15,786	13,876	129,409		10,773	11,732	59%		16,491	-100%
	CO2	7,175	4,503	10,862	11,640	107,187	-55,598						
	CH4	153	301	114	105	337	286						
	N2O	0.1	0.1	2.1	0.2	3.2	22						
	Total	11,034	12,056	14,315	14,326	116,581	-41,761						

Note: Total GHG emissions are shown as CO2-equivalents. Columns do not add due to multiplication of global warming potential factors for CH4 and N2O (25 and 298, respectively).

^a Electricity emission factors are defined for Western (W) and Eastern (E) European regions to reflect differences in electricity generation mixes in these regions.

^b Ethanol is assumed to be corn-based E85 in North America and 100% sugarcane ethanol in South America

END-USE EMISSIONS

End-use emissions are the emissions generated at the point of energy use, such as the vehicle, generator, or space heater. These emissions are specific to the technologies used for each application in each region, and therefore different sources are necessary to estimate end-use emission factors. Generally, the study considers energy consumption and efficiency data provided by equipment manufacturers. For some applications, such as distributed power generation, the study analyzed data from dozens of equipment manufacturers and averaged energy consumption and efficiency data for various fuels analyzed. For others (e.g., vehicles), analysts sought a single vehicle platform that was available from the vehicle manufacturer in multiple fuel configurations, including LP Gas, and representative of a large portion of light-duty vehicles in the region being analyzed. This approach allowed analysts to isolate the differences in GHG emissions resulting from the use of LP Gas versus other fuels, rather than GHG emissions differences that may result from different vehicle weights or systems configurations. The specific assumptions and data sources used for each application are presented in detail in the Appendix of this report.

SUMMARY OF FINDINGS

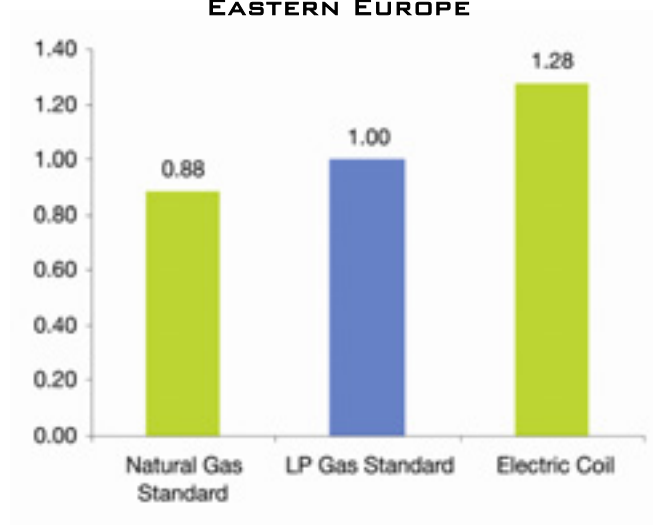
This section presents a summary of the findings of this study. The following pages contain a series of graphs that show the GHG emissions profiles for LP Gas and other fuels in the applications and regions considered. The fuels selected for analysis reflect regional differences in fuels used in that application. Data shown include both upstream and end-use emissions. The comparisons between fuels in each regional-specific analysis of a given application are meaningful. However, because of the significant regional variations in equipment, fuel supply chains, and regulations, readers are cautioned against drawing conclusions from cross-regional comparisons as they may be misleading.

ALL RESULTS ARE NORMALISED RELATIVE TO THE GHG EMISSIONS OF LP GAS AND, THEREFORE, HAVE NO UNITS.


COOKING





EASTERN EUROPE






WESTERN EUROPE

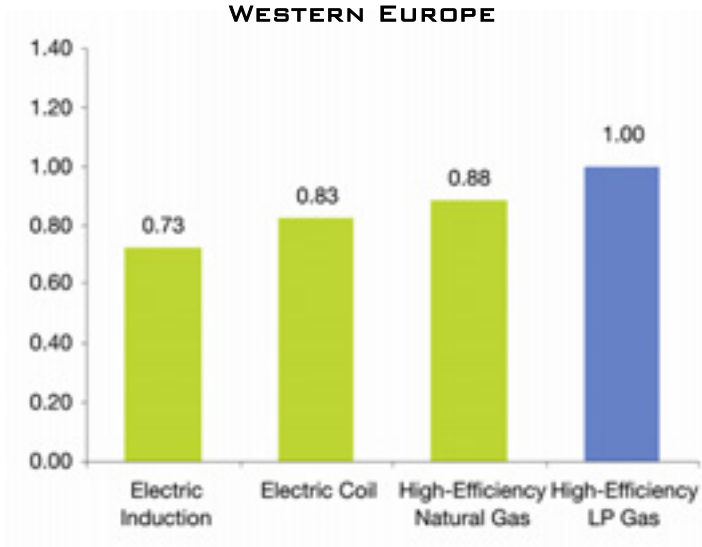



COOKING (CONT.)

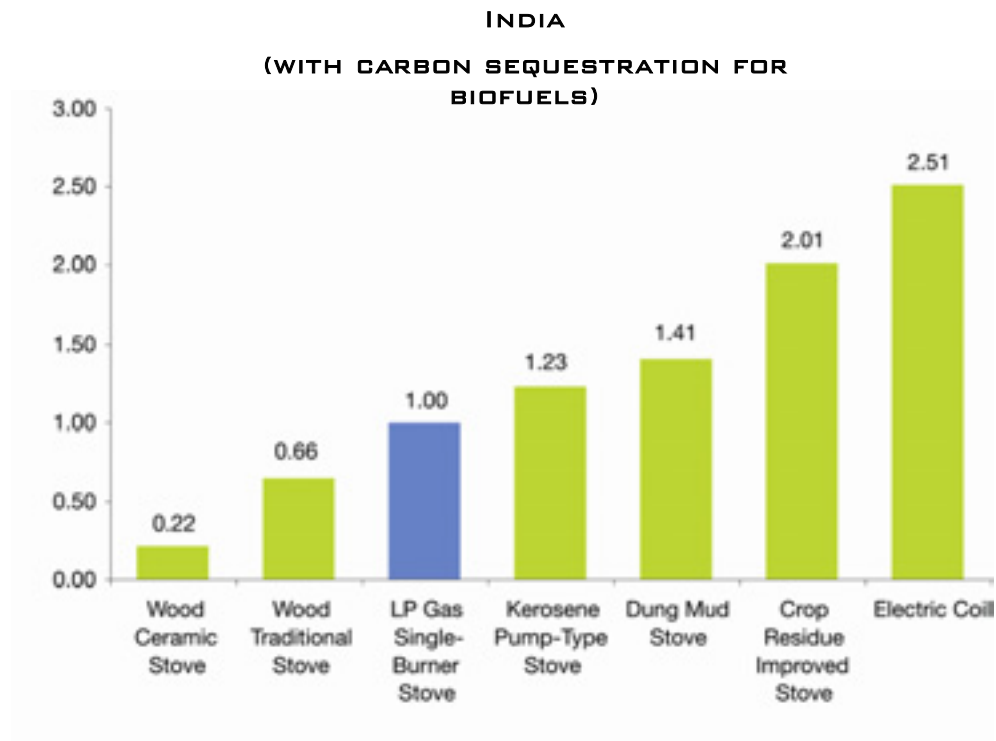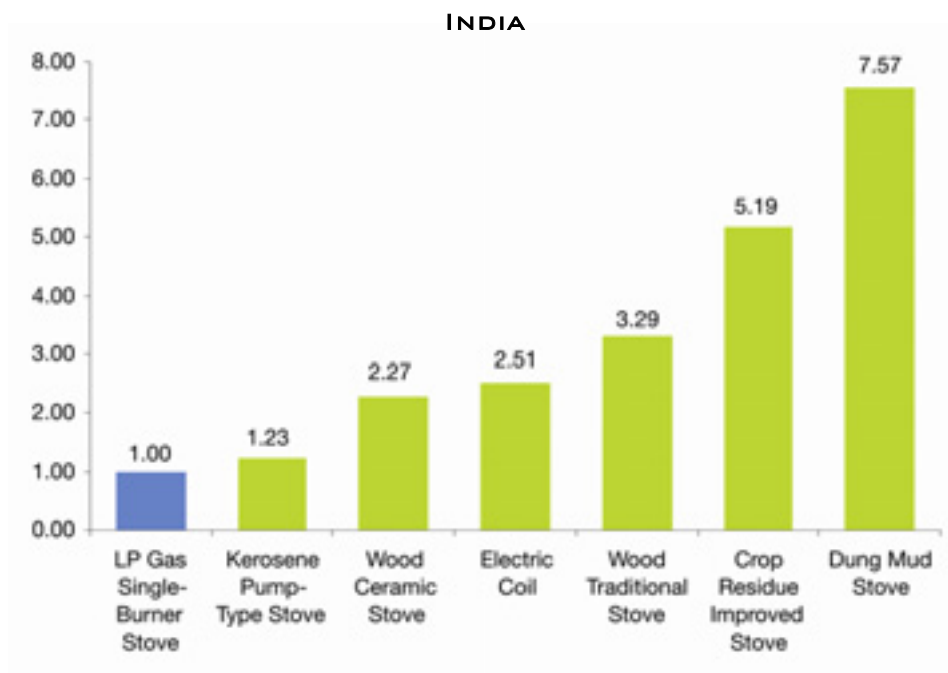




COOKING (CONT.)

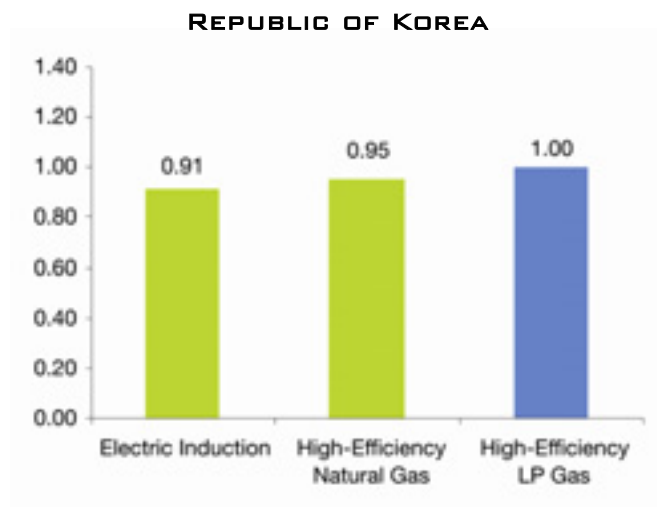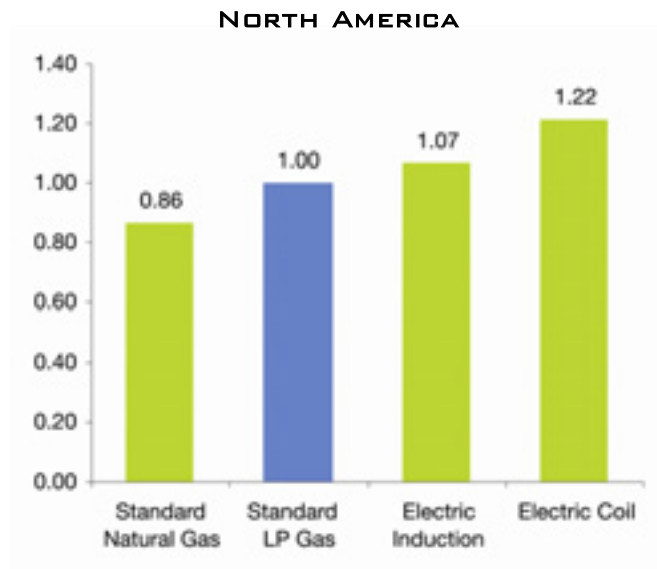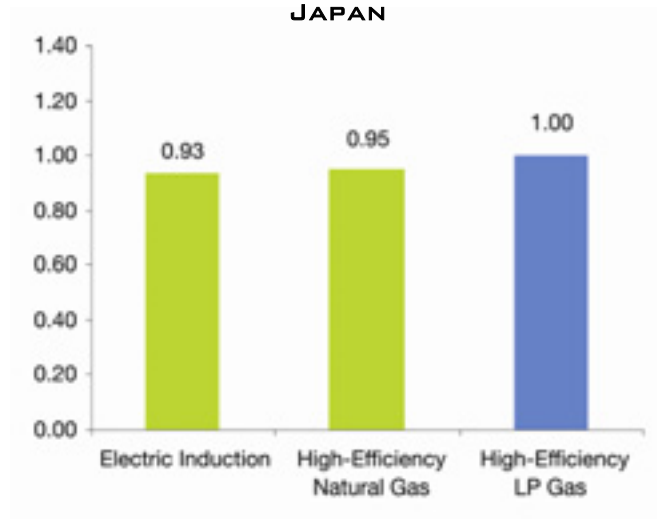




COOKING (CONT.)

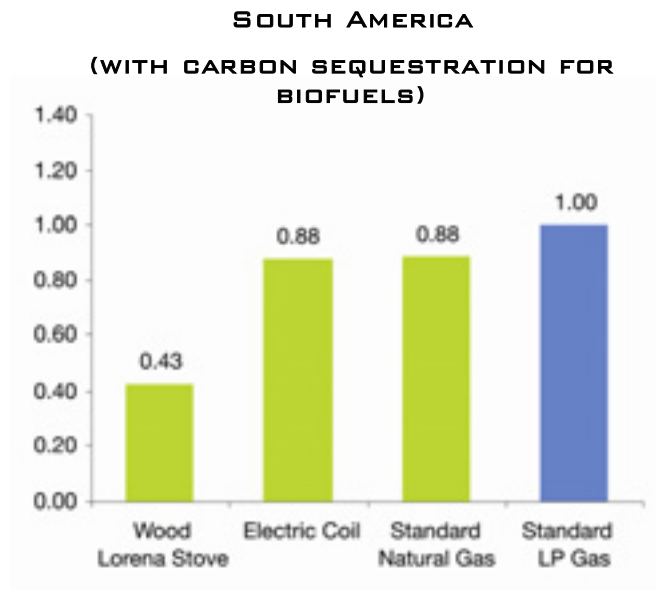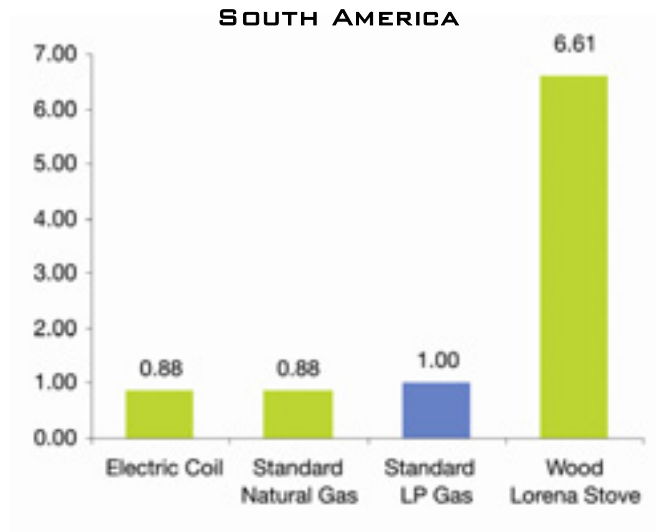





DISTRIBUTED POWER GENERATION

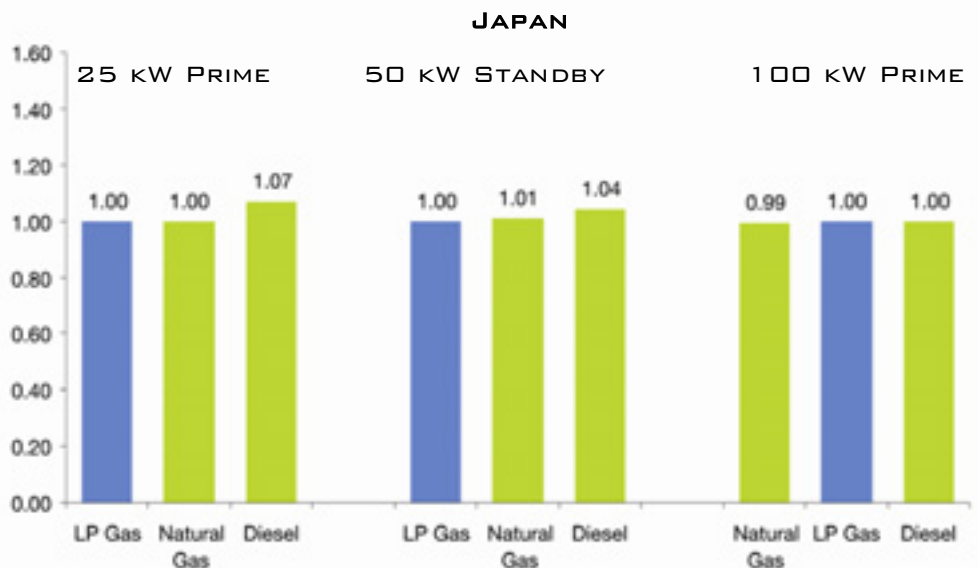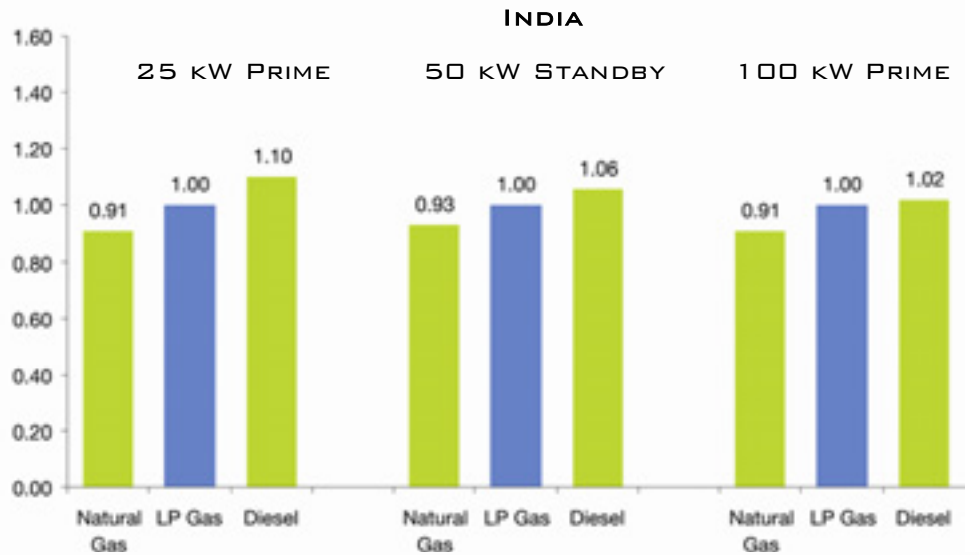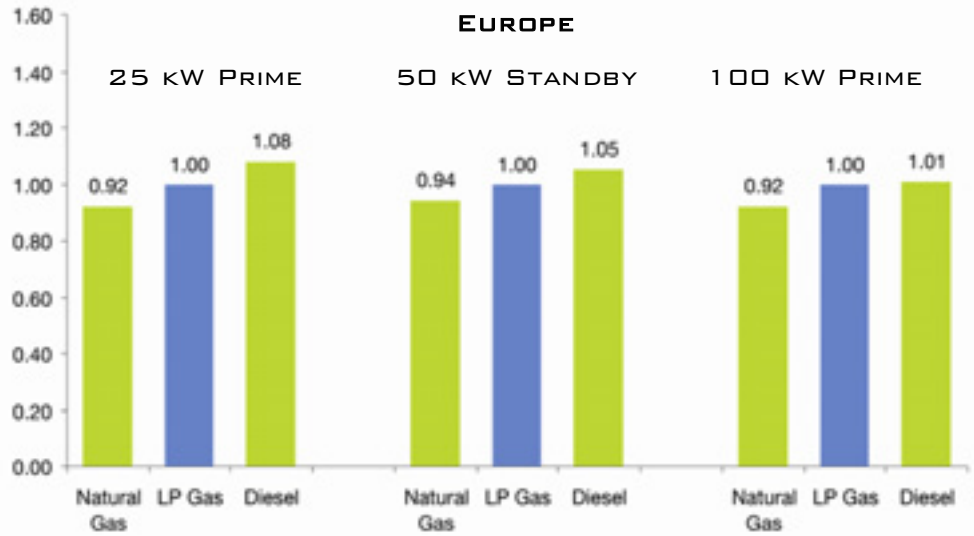

DISTRIBUTED
POWER
GENERATION
(CONT.)

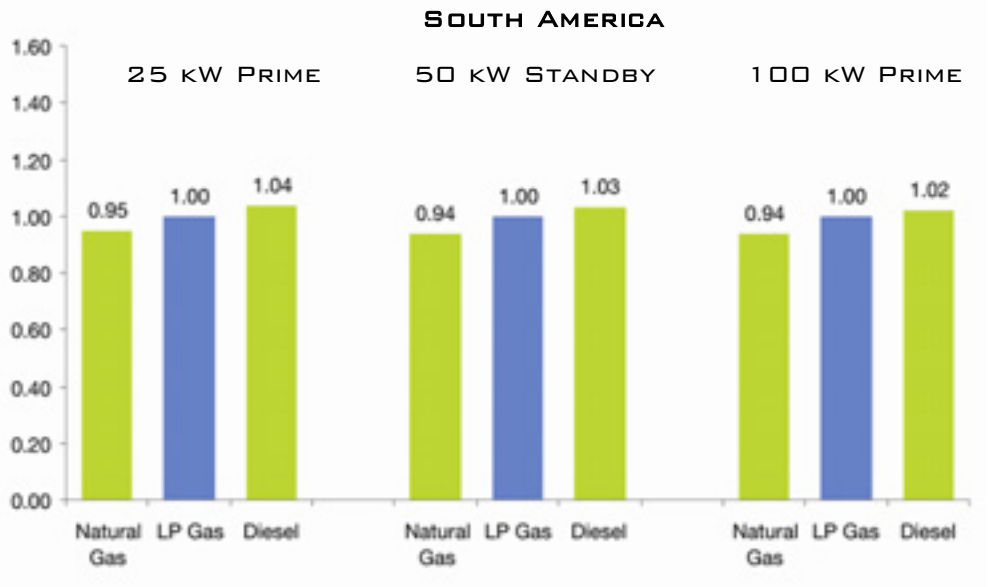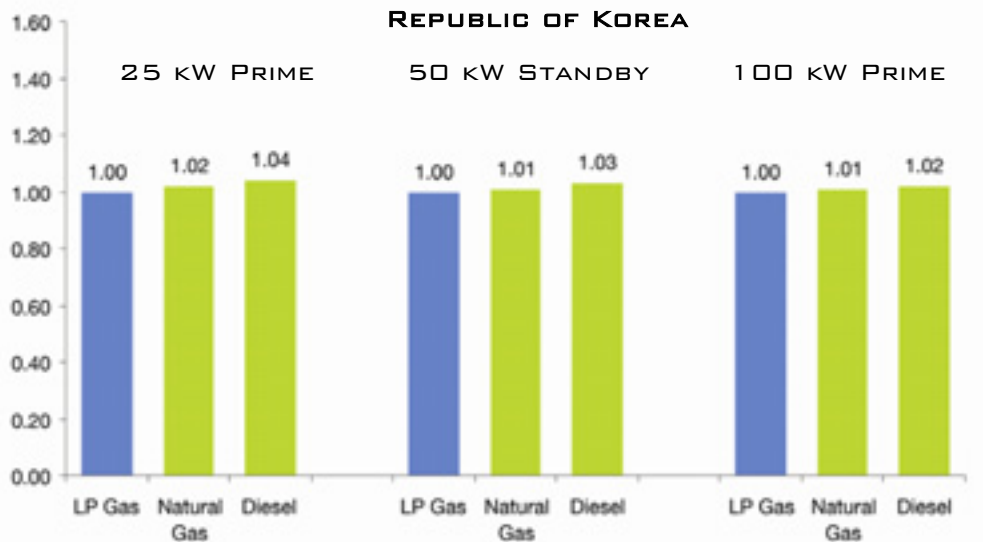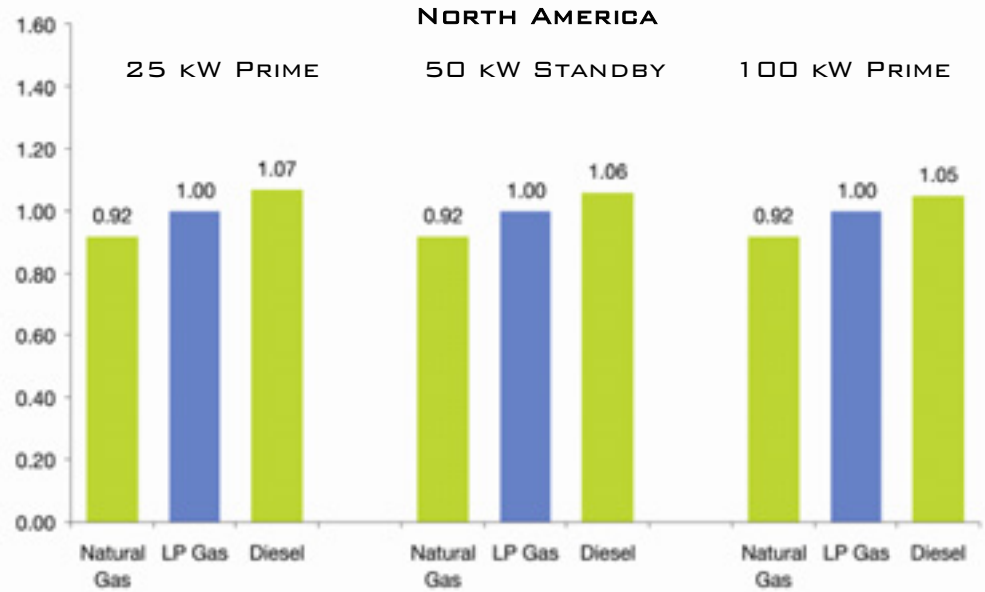


RESIDENTIAL SPACE HEATING

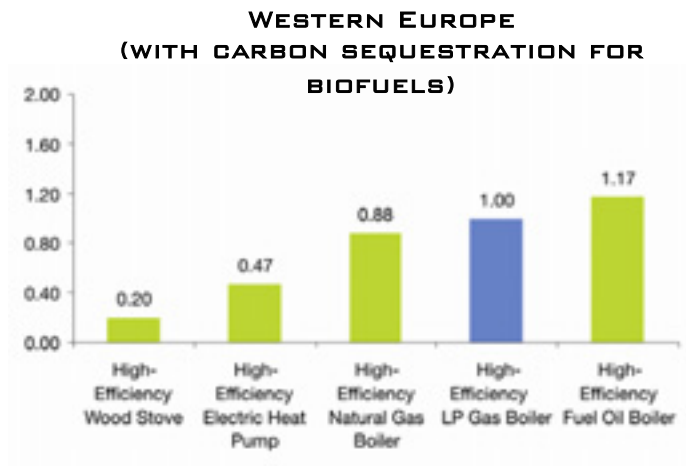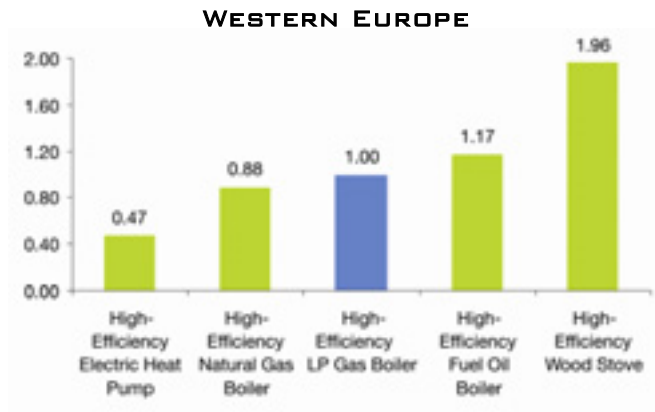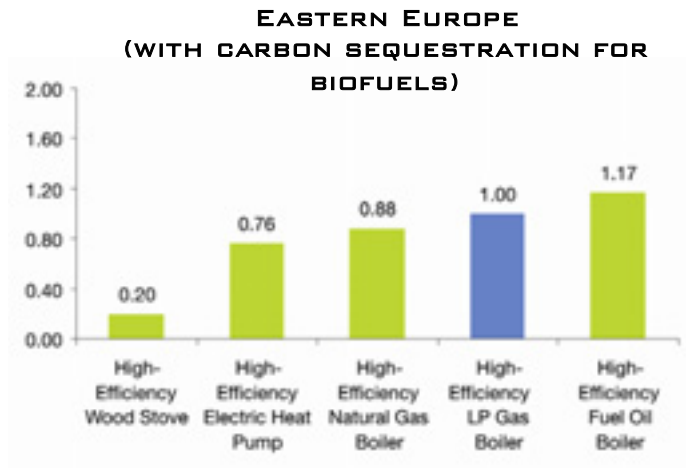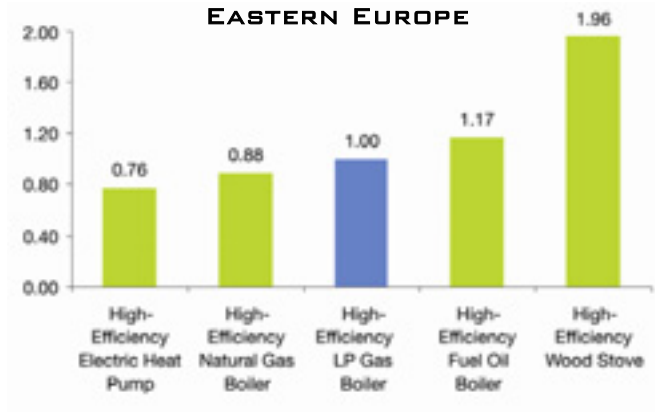


RESIDENTIAL SPACE HEATING (CONT.)



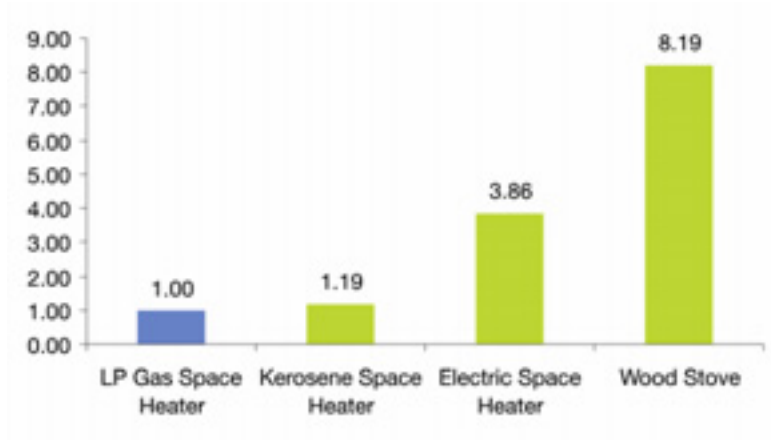
INDIA





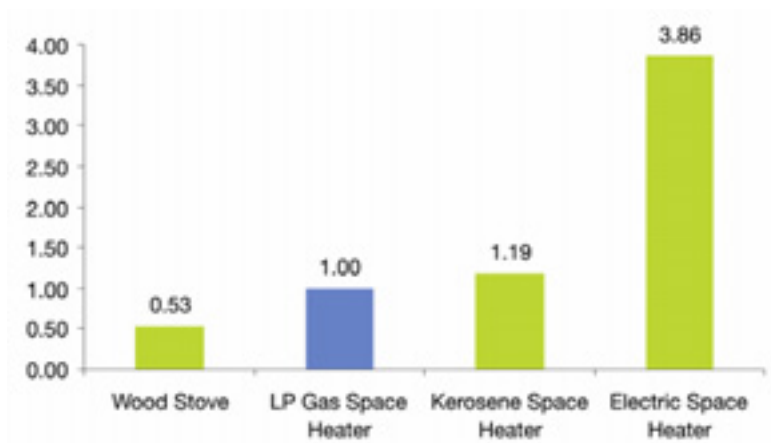
INDIA
(WITH CARBON SEQUESTRATION FOR BIOFUELS)




JAPAN

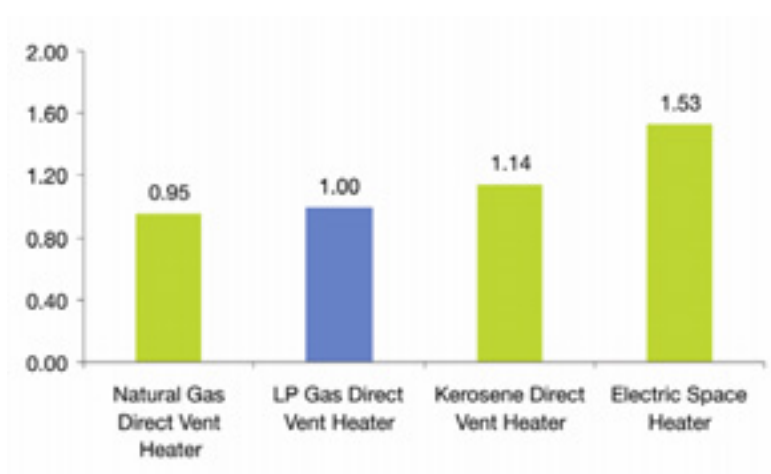




RESIDENTIAL SPACE HEATING
(CONT.)

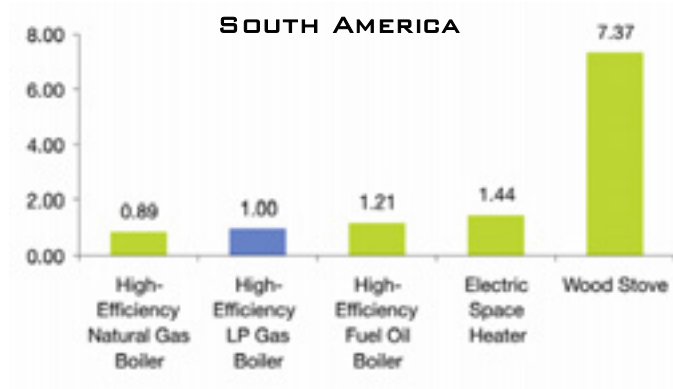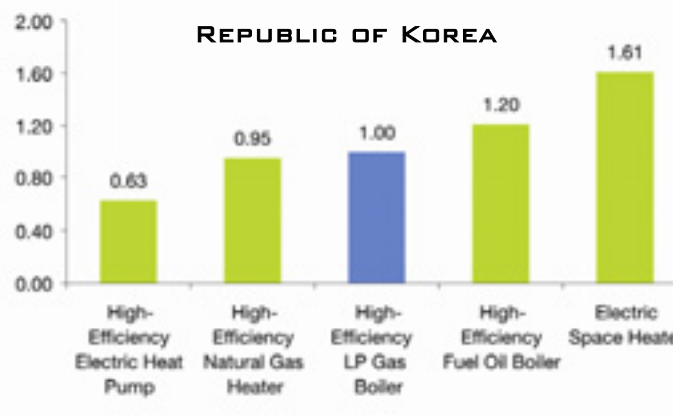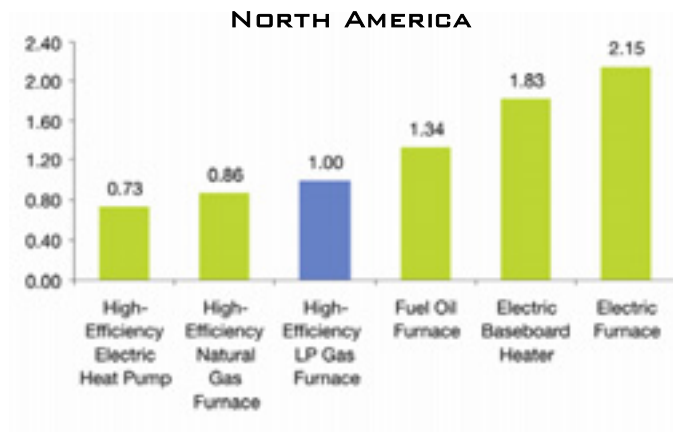




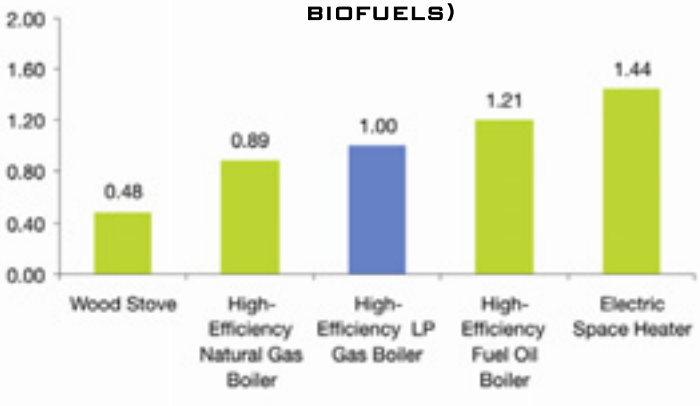
**SOUTH AMERICA
(WITH CARBON SEQUESTRATION FOR
BIOFUELS)**






RESIDENTIAL WATER HEATING – CENTRAL

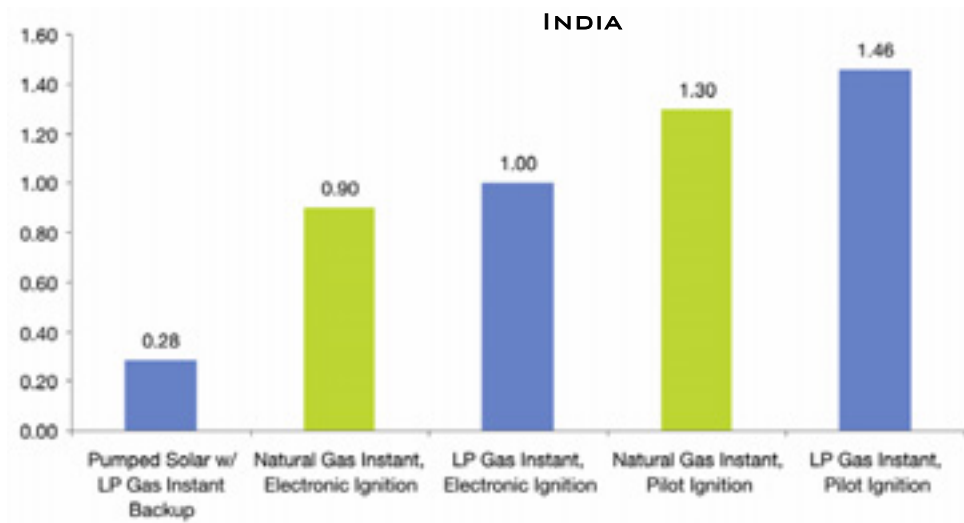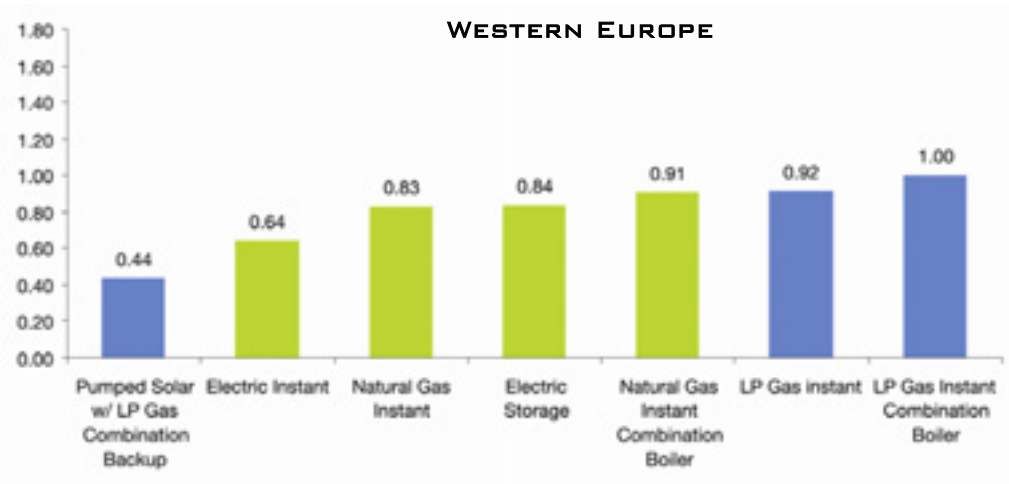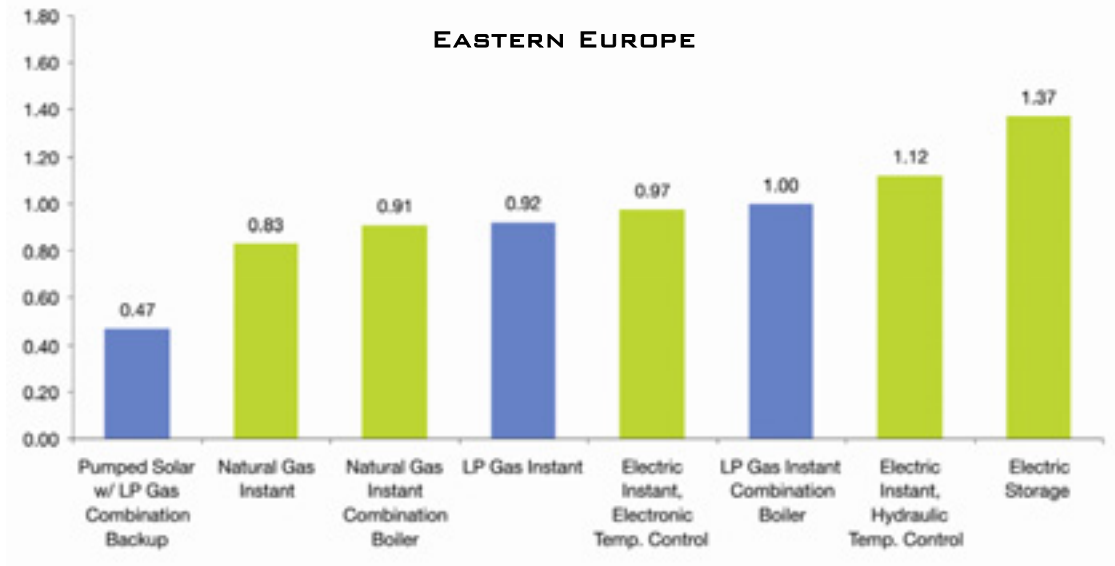

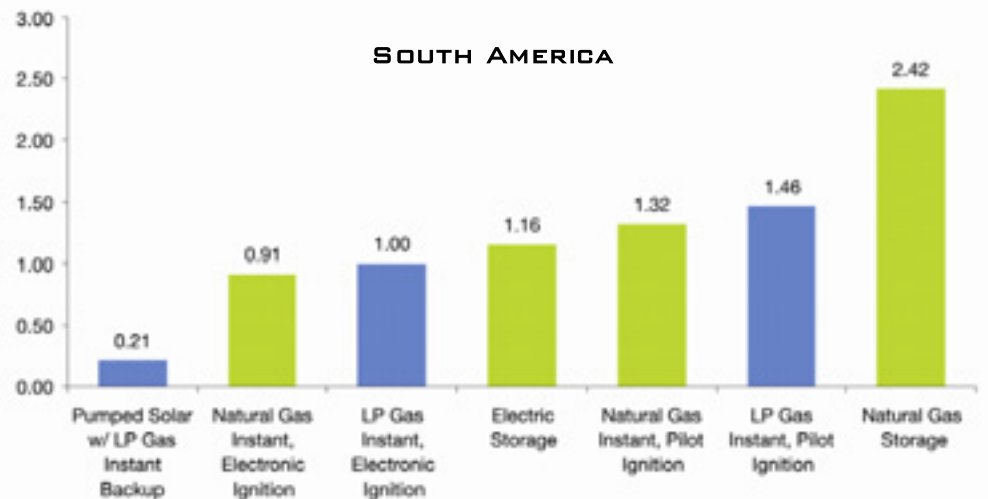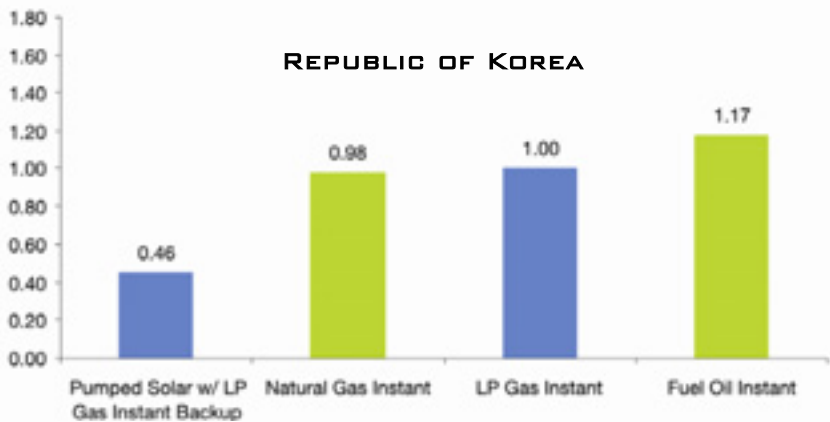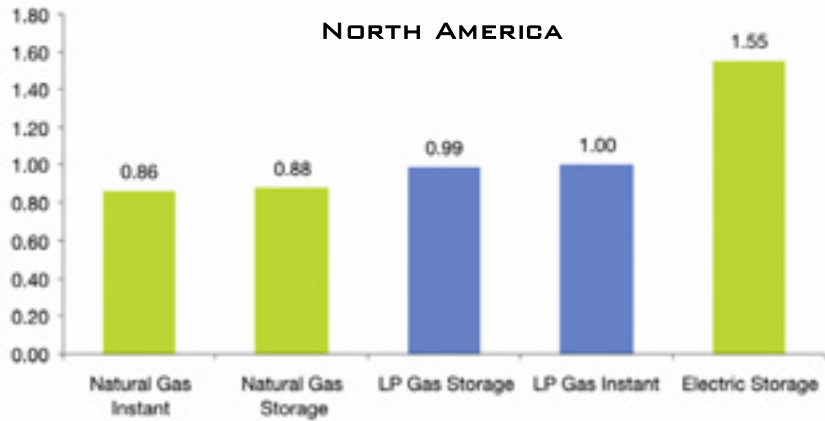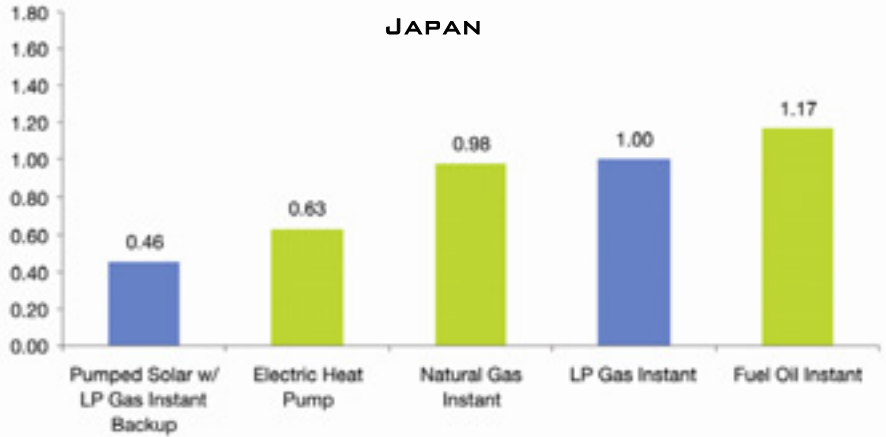RESIDENTIAL WATER HEATING – CENTRAL (CONT.)



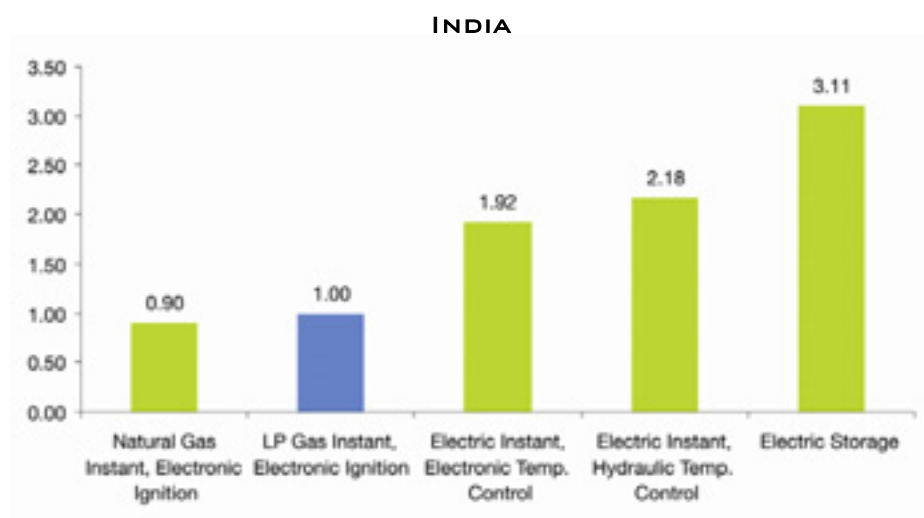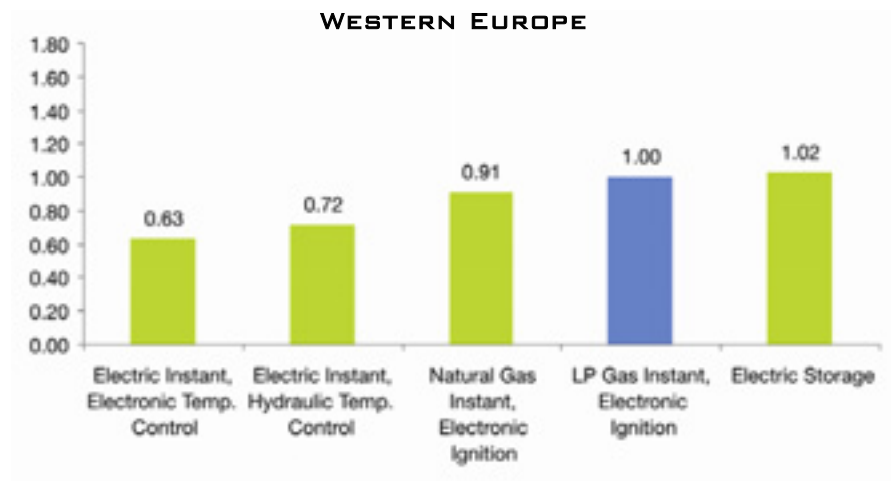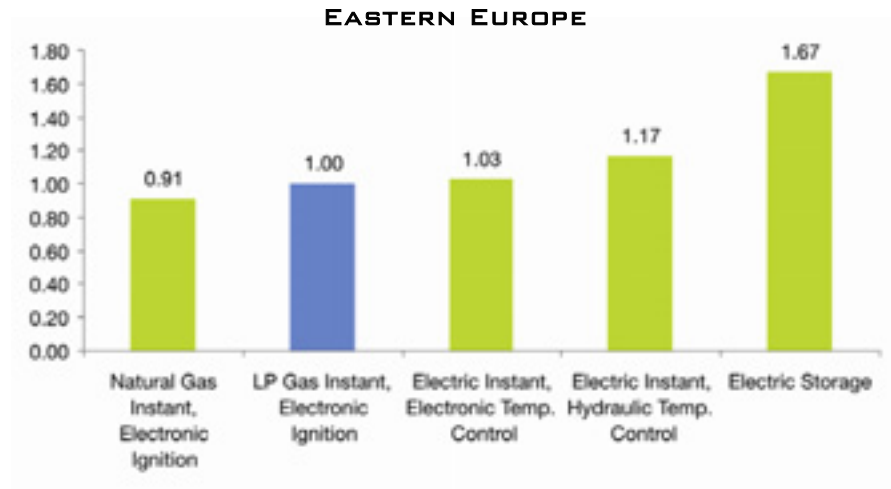
RESIDENTIAL WATER HEATING – POINT-OF-USE




RESIDENTIAL WATER HEATING – POINT-OF-USE (CONT.)



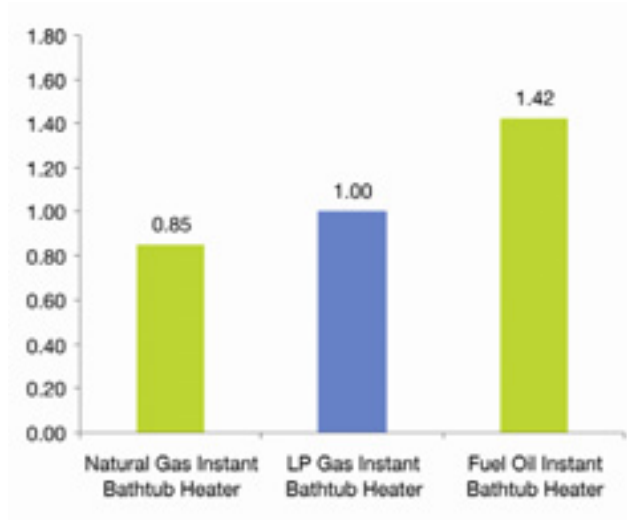JAPAN



SOUTH AMERICA

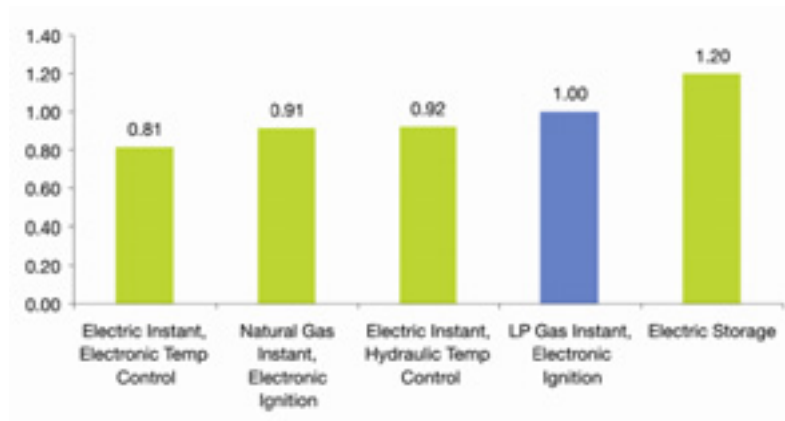

APPLICATION-SPECIFIC ANALYSES

The following pages present detailed information regarding the five applications considered in this study. Each section includes a brief description of the application area; energy use and upstream, end-use, and total GHG emissions data; market data or information; key assumptions made in the analysis; and additional notes to explain the analysis. A complete list of assumptions and references for each application is provided in the Appendix.

COOKING

Consumers in industrialized countries choose from numerous stove tops and ovens using LP Gas, natural gas, and electricity. In developing countries people use more basic LP Gas, natural gas, or kerosene cookers or locally manufactured stoves that burn biomass (e.g., wood, crop residues, and animal dung), often with significant adverse human health and environmental consequences.

Cooking efficiencies may vary widely with the size and composition of the cooking pot and whether a lid is used. In standardized tests, the efficiency of electric stovetop cookers does not vary substantially between manufacturers. Governments have not issued efficiency standards for stovetop cookers. In developing countries, food may be cooked on a smaller single or double cooker that sits on the floor or tabletop. Biomass cookers in this analysis are stoves burning locally available fuels. In all cases the stoves incorporate simple chimneys or vents to improve efficiency and remove smoke.

MARKET

Europe: Cooking practices vary by country according to fuel availability and local preferences. Sales of electric stoves slightly outpace gas stoves across the region; however gas stoves are nearly universal in Italy while nearly all stoves sold in Germany and Sweden are electric. High-efficiency gas and electric equipment was analyzed for Western Europe, where consumers place a high value on efficiency. In Eastern Europe standard gas and electric stovetops are more commonly sold.

India: Efficiency data is specific to India and is based on a boiler water test using locally available cooking equipment and fuels. This analysis uses only seven of the 28 combinations tested by the Tata Energy Research Institute.

Japan: Gas stovetops have traditionally been dominant in Japan. Interest is growing in electric induction stovetops due to strong interest in technology, efficiency, and reducing dependence on imported natural gas.

North America: Standard-efficiency gas and electric stovetops dominate consumer sales in this region.




Republic of Korea: Technology options are assumed to be the same as in Japan.





South America: Standard efficiency gas and electric stovetops are typical in this region. In rural areas locally produced Lorena stoves are common.

KEY ASSUMPTIONS

1. The base case analysis was heating one liter of water from 20°C to 100°C on a stovetop. This corresponds to 0.335 MJ of heat being delivered to the cooking vessel.
2. The efficiencies of gas and electric stovetop cookers are based on standardized tests performed by the U.S. government. (DOE 1996).
 - a. LP Gas or natural gas stovetop: Standard (open flame burner): 39.9%. High efficiency (thermostatically controlled, sealed burner design): 42.0%.
 - b. Electric stovetop: Coil: 73.7%. Induction: 84.0%. The coil uses electrical resistance to generate heat, which is conducted directly to the pot. The induction element generates a high-frequency magnetic field that produces eddy currents in the cooking vessel, causing it to heat up. Some electric stoves use smooth heating elements, but performance is similar (74.2%) to electric coils.
3. LP Gas and natural gas burners are assumed to have the same efficiencies.
4. The biomass used for cooking is assumed to be 100% renewable.

ENERGY END-USE DATA*

	Fuel / Technology	Energy Use (kJ)	Upstream (kg CO ₂ e)	Downstream (kg CO ₂ e)	Total (kg CO ₂ e)
E. Europe 	Natural Gas: Standard	839	10.3	42.9	53.3
	LP Gas: Standard	839	9.7	50.6	60.3
	Electric: Coil	454	77.2	0	77.2
W. Europe 	Electric: Induction	399	41.5	0	41.5
	Electric: Coil	454	47.4	0	47.4
	Natural Gas: High Efficiency	797	9.8	40.8	50.6
	LP Gas: High Efficiency	797	9.2	48.0	57.3
India 	LP Gas: Single Burner Stove	625	7.8	42.7	50.5
	Kerosene: Pump-Type Stove	713	12.3	49.6	61.9
	Wood: Ceramic Stove	1,155	0	114.4	114.4
	Wood: Ceramic Stove with Biomass Carbon Credit	1,155	- 103.2	114.4	11.2
	Electric: Coil	451	126.8	0	126.8
	Wood: Traditional Stove	1,522	0	166.0	166.0
	Wood: Traditional Stove with Biomass Carbon Credit	1,522	- 132.8	166.0	33.1
	Crop Residue: Improved Stove	2,481	0	262.11	262.11
	Crop Residue: Improved Stove with Biomass Carbon Credit	2,481	- 160.4	262.11	101.7
	Dung: Mud Stove	3,563	0	382.1	382.1
Dung: Mud Stove with Biomass Carbon Credit	3,563	- 311.1	382.1	71.0	

	Fuel / Technology	Energy Use (kJ)	Upstream (kg CO2e)	Downstream (kg CO2e)	Total (kg CO2e)
Japan 	Electric: Induction	399	52.9	0	52.9
	Natural Gas: High Efficiency	797	13.2	40.8	53.9
	LP Gas: High Efficiency	797	8.6	48.0	56.7
N. America 	Natural Gas: Standard	839	8.6	42.9	51.5
	LP Gas: Standard	839	9.0	50.6	59.6
	Electric: Induction	399	63.6	0	63.6
	Electric: Coil	454	72.5	0	72.5
Korea 	Electric: Induction	399	51.6	0	51.6
	Natural Gas: High Efficiency	797	13.2	40.8	53.9
	LP Gas: High Efficiency	797	8.6	48.0	56.6
S. America 	Natural Gas: Standard	839	10.3	42.9	53.3
	Electric: Coil	454	53.0	0	53.0
	LP Gas: Standard	839	9.7	50.6	60.3
	Wood: Lorena Stove	3,721	0	398.8	398.8
	Wood: Lorena Stove with Biomass Carbon Credit	3,721	- 372.8	398.8	26.0

* Unit of comparison: Heating one liter of water from 20°C to 100°C on a stovetop.
 (Note: This data is not intended for cross-regional comparison. Each region's results should be examined separately due to inherent differences in applications across regions.)

NOTES

- ¹ Some governments are encouraging consumers to switch from electric to gas appliances (EU) while other governments encourage the use of electric appliances (Japan).
- ² The major energy-saving measure available to manufacturers is the replacement of pilot lights with electronic ignition. Standing pilot lights can consume more energy than is used for cooking over the life of a stovetop. This analysis assumes that none of the stovetops have a pilot light.
- ³ Because LP Gas and natural gas stovetops are assumed to have the same efficiency, differences in GHG emissions within a region are due to upstream and downstream emission factors.
- ⁴ Biomass stove emissions are not zero because combustion produces CH₄ and N₂O which have high GHG multipliers. However, upstream GHG emissions associated with biomass cooking are assumed to be zero.

DISTRIBUTED POWER GENERATION

Distributed power-generation provides small-scale production of electricity at or near the location where the power is used. Distributed generation is employed for a variety of applications and users. Commercial users operate distributed generators as backup power (standby generators) for critical functions such as data centers or hospitals, or as primary power (prime generators) for operations off the electric grid. Residential users employ standby generators to supplement interrupted grid electricity, or use prime generators in remote areas not reached by the electric grid.

Reciprocating internal combustion engines represent the most widespread and mature distributed generation technology. These engines come in two varieties: spark-ignition and compression-ignition. Spark-ignition engines commonly operate on LP Gas or natural gas, and compression engines operate on diesel fuel. Both engine types can be designed for standby use, which normally run for less than about 500 hours per year in short intervals, or they can be designed for prime use, which are rated and designed for regular use throughout the year. These engines are packaged with supporting systems into generator sets, or “gensets.”


The type of genset technology does not vary significantly among the regions evaluated in this study. Major manufacturers in each region supply generators to customers worldwide. The electric power frequency does vary among world regions, so only generators that are able to supply power at the region-specific electric frequency were considered in this analysis. North America, South America, and Korea primarily use 60 Hz power, while Europe, India, and Japan use 50 Hz power in most cases.

Distributed generators for onsite use typically range from a few kW to several hundred kW (Figure 1).







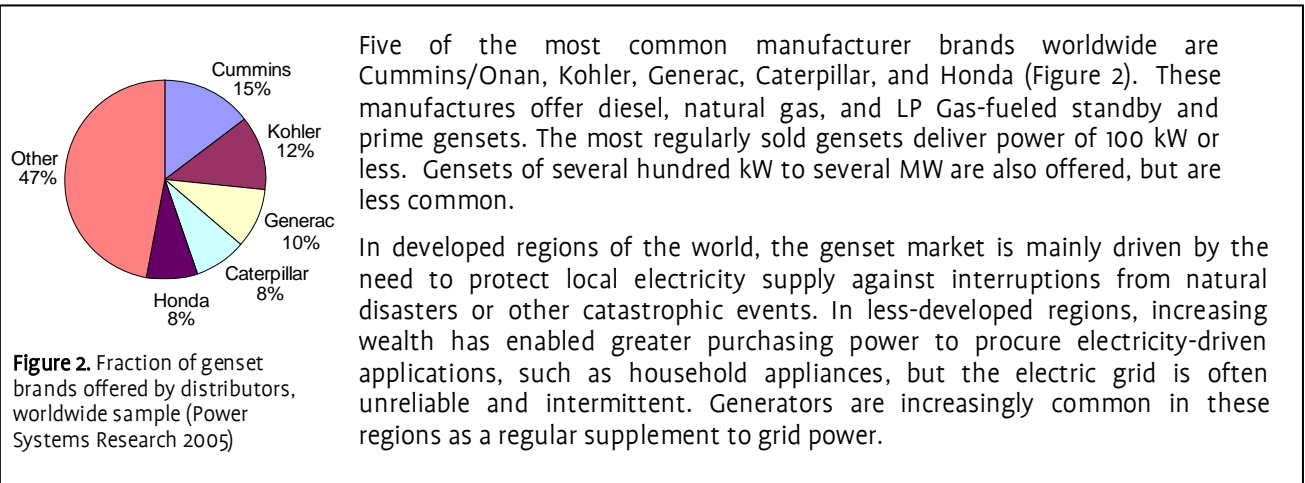

Figure 1. Small and mid-sized spark engine distributed generators (Honda 2008, Cummins 2008)

MARKET



KEY ASSUMPTIONS

1. Energy use is based on manufacturer specifications (specs) for power-only (no CHP) gensets operating at 1800 rpm for 60 Hz output and at 1500 rpm for 50 Hz output and 100% nameplate load.
2. Manufacturer specifications used to calculate energy use is based on over 150 commercially available units that contained adequate data and were available in regions of interest (see appendix). Different manufacturers provide different energy use requirements for genset ratings. Statistical log-linear regression of genset data of a given power frequency and size were used to estimate energy end use.
3. Gensets fuel usage for North America, South America, and Korea are based on 60 Hz power. Europe, India, and Japan are based on 50 Hz power.

Region	Fuel	25 kW Prime Genset				50 kW Standby Genset				100 kW Prime Genset			
		Energy Use (MJ/h)	Up-stream (kg CO2e)	End-Use (kg CO2e)	Total (kg CO2e)	Energy Use (MJ/h)	Up-stream (kg CO2e)	End-Use (kg CO2e)	Total (kg CO2e)	Energy Use (MJ/h)	Up-stream (kg CO2e)	End-Use (kg CO2e)	Total (kg CO2e)
Europe 	Natural Gas	367	4.53	18.78	23.3	716	8.83	36.62	45.4	1,457	17.96	74.51	92.5
	LP Gas	351	4.07	21.15	25.2	672	7.79	40.47	48.3	1,395	16.18	84.07	100.2
	Diesel	317	4.86	22.50	27.4	585	8.97	41.51	50.5	1,169	17.93	83.02	100.9
India 	Natural Gas	367	4.55	18.78	23.3	716	8.87	36.62	45.5	1,457	18.05	74.51	92.6
	LP Gas	351	4.39	21.15	25.5	672	8.40	40.47	48.9	1,395	17.45	84.07	101.5
	Diesel	317	5.49	22.50	28.0	585	10.13	41.51	51.6	1,169	20.26	83.02	103.3
Japan 	Natural Gas	367	6.06	18.78	24.8	716	11.82	36.62	48.4	1,457	24.05	74.51	98.6
	LP Gas	351	3.80	21.15	25.0	672	7.27	40.47	47.7	1,395	15.11	84.07	99.2
	Diesel	317	4.32	22.50	26.8	585	7.97	41.51	49.5	1,169	15.94	83.02	99.0
N. America 	Natural Gas	377	3.84	19.27	23.1	741	7.55	37.88	45.4	1,404	14.32	71.82	86.1
	LP Gas	352	3.80	21.22	25.0	698	7.53	42.07	49.6	1,318	14.21	79.43	93.6
	Diesel	305	5.03	21.67	26.7	599	9.86	42.53	52.4	1,123	18.48	79.71	98.2
Korea 	Natural Gas	377	6.21	19.27	25.5	741	12.21	37.88	50.1	1,404	23.16	71.82	95.0
	LP Gas	352	3.79	21.22	25.0	698	7.51	42.07	49.6	1,318	14.17	79.43	93.6
	Diesel	305	4.24	21.67	25.9	599	8.31	42.53	50.8	1,123	15.58	79.71	95.3
S. America 	Natural Gas	377	4.54	19.27	23.8	741	8.93	37.88	46.8	1,404	16.93	71.82	88.7
	LP Gas	352	3.89	21.22	25.1	698	7.71	42.07	49.8	1,318	14.55	79.43	94.0
	Diesel	305	4.37	21.67	26.0	599	8.58	42.53	51.1	1,123	16.09	79.71	95.8

*Energy Use in MJ per hour operating at nameplate rating. Upstream, Downstream, and Total Emissions in kg CO₂-equivalent per hour operating at nameplate rating. (Note: This data is not intended for cross-regional comparison. Each region's results should be examined separately due to inherent differences in applications across regions.)

RESIDENTIAL SPACE HEATING

Residential space heating utilizes either a centralized system to distribute warm air or hot water throughout the home or individual heating units that heat either a single room or a part of a room. Warm air for a centralized system can be generated by a furnace or electric heat pump. In other centralized systems, a boiler produces hot water that is distributed to each room in a home. Furnaces and boilers can use LP Gas, natural gas, fuel oil or electricity. Unlike an electric furnace, which generates heat by electric resistance, heat pumps use an energy-efficient vapor-compression refrigeration cycle to heat the home.

Single-room heaters are smaller and can operate independently in a home. Single-room heaters that burn LP Gas, natural gas, fuel oil, or wood typically incorporate a “direct vent” design in which room air is heated and re-circulated while combustion gases are exhausted to the outdoors. In developing countries small space heaters using LP Gas or kerosene may not incorporate heat exchangers and all combustion gases are released into the living space. Electric baseboard heaters and space heaters use electric resistance to generate heat.

The amount and type of space heating technologies used in homes vary by region, reflecting differences in home construction, cultural attitudes, fuel availability, climate, and cost. This analysis compares the relative GHG emissions associated with space heating for one year. In general, the technologies analyzed reflect the most efficient commonly used systems in each region.

MARKET DATA

Europe: Europe is a highly diverse region in terms of climate and housing stock. Historically high energy costs and strong government requirements for efficiency and labeling result in the use of highly efficient space heating equipment, especially boilers. Sophisticated wood stoves are used in northern Europe. Many urban homes utilize district heating systems, which are not included in this analysis.

India: Space heating is not common in India and limited to northern areas. Centralized furnaces and boilers are almost unknown. Small electric resistance space heaters are a common heating option. Biomass-fired cook stoves may be kept in use throughout the day to provide space heating.

Japan: Most homes do not have central heat and are maintained at cooler temperatures (15°C) than other regions. Individual room heaters using a direct vent design are highly efficient as required by government standards.

North America: North America features larger and warmer (20°C) homes than in other regions. Warm air systems are dominant, and a large number of manufacturers produce equipment to meet energy-efficiency labeling and efficiency requirements. Older heating systems used plentiful and affordable natural gas and electricity, but recent price increases have boosted consumer interest in more efficient technologies.

Republic of Korea: Rising incomes and government policies have resulted in fuel oil displacing coal and wood as the dominant heating fuels over the past 20 years. Central heating systems using boilers are common.

South America: Heating demands generally are lower than other regions, but some form of home heating is universal. About half of rural homes use wood to cook and heat. Energy policies in the region’s largest country, Brazil, include energy labeling and efficiency requirements, although space heating is not specifically targeted.

KEY ASSUMPTIONS

1. The analysis uses a typical seasonal space heating requirement that varies by region:
 - a. Europe: 18,191 MJ based on an average E.U. household in 2005.
 - b. India and Japan: 3,600 MJ based on 1,000 hours of heating from a typical space heater.
 - c. North America: 40,095 MJ based on an average-sized (U.S.) home in a climate with 4,000-5,499 heating degree days.
 - d. Korea: 19,200 MJ based on estimated average residential energy use in 1994.
 - e. South America: 10,551 MJ
2. Technology selection varies by region:
 - a. Europe: Based on highest boiler efficiencies in practice as identified by E.U. maximum heat pump efficiency data from North America.
 - b. India: Small space heaters (LP Gas, kerosene, electricity) are not vented to the outdoors and 100% of energy is delivered to the living space. Wood stove efficiency is typical as identified by United Nations data.
 - c. Japan: Gas and oil heater efficiencies are based on Japanese “Top Runner” standards. Electric space heater is assumed to deliver 100% of energy to the living space.
 - d. North America: Energy efficiencies based on the highest annual fuel utilization efficiency (AFUE) reported in the GAMA Directory of Certified Efficiency Ratings (GAMA 2006) for gas and fuel oil furnaces with greater than 60,000 Btu-hour ratings. Assumed 100% conversion efficiency of electric heaters and electric furnaces.
 - e. Korea: Boiler efficiencies are based on the highest efficiencies reported by manufacturers. Maximum heat pump efficiency data from North America. Electric space heater is assumed to deliver 100% of energy to the living space.
 - f. South America: Boiler efficiencies are based on the highest efficiencies reported by manufacturers. Maximum heat pump efficiency data from North America. Electric space heater is assumed to deliver 100% of energy to the living space. Wood stove efficiency is typical as identified by United Nations data.
3. Centralized heating systems experience distribution losses in the pipes and ductwork that do not occur in single room and portable heaters. These losses are added to the heating demand assumed for the region. In boiler systems the heat losses in the pipes are assumed to be 5%. In furnace systems the heat losses in ductwork are assumed to be 15% in this analysis.







NOTES

¹ Differences in calculating the efficiency of boiler and furnaces by manufacturers makes it difficult to compare systems between regions. For instance, the duration and frequency of equipment cycling is determined by government regulations, which can affect overall performance.

² Heat pump performance is based on a U.S. government test, which incorporates periodic operation of (less efficient) electric resistance backup heating during extremely cold weather.

³ The efficiencies of central heating systems are diminished by losses in ductwork (15%) and boiler system piping (5%).

ENERGY END-USE DATA*

	Fuel	Energy Use (MJ)	Upstream (kg CO2e)	End Use (kg CO2e)	Total (kg CO2e)
 Europe	Electricity: High-Efficiency Heat Pump	7,134	743 (W) 1,212 (E)	0	743 (W) 1,212 (E)
	Natural Gas: High-Efficiency Boiler	22,063	272	1,128	1,400
	LP Gas: High-Efficiency Boiler	22,063	256	1,329	1,585
	Fuel Oil: High-Efficiency Boiler	22,063	338	1,520	1,858
	Wood: High-Efficiency Stove	26,404	0	3,114	3,114
	Wood: High-Efficiency Stove with Biomass Carbon Credit	26,404	- 2,803	3,114	311
 India	LP Gas: Space Heater	4,390	45	217	262
	Kerosene: Space Heater	4,390	62	248	310
	Electricity: Space Heater	4,390	1,012	0	1,012
	Wood: Stove	20,000	0	2,144	2,144
	Wood: Stove with Biomass Carbon Credit	20,000	- 2,004	2,144	140
 Japan	Natural Gas: Direct-Vent Heater	4,390	72	225	297
	LP Gas: Direct-Vent Heater	4,390	48	264	312
	Kerosene: Direct-Vent Heater	4,311	59	297	356
	Electricity: Space Heater	3,600	477	0	477
 N. America	Electricity: High-Efficiency Heat Pump	16,095	2,567	0	2,567
	Natural Gas: High-Efficiency Furnace	49,291	503	2,521	3,023
	LP Gas: High-Efficiency Furnace	49,291	531	2,969	3,501
	Fuel Oil: Furnace	54,851	903	3,778	4,681
	Electricity: Baseboard Heater	40,096	6,396	0	6,396
	Electricity: Furnace	47,172	7,524	0	7,524
 Korea	Electricity: High-Efficiency Heat Pump	7,529	974	0	974
	Natural Gas: High-Efficiency Heater	21,755	359	1,113	1,471
	LP Gas: High-Efficiency Boiler	21,755	234	1,311	1,544
	Fuel Oil: High-Efficiency Boiler	22,456	312	1,547	1,859
	Electricity: Space Heater	19,200	2,485	0	2,485
 S. America	Natural Gas: High-Efficiency Boiler	11,955	144	611	755
	LP Gas: High-Efficiency Boiler	11,955	132	720	852
	Fuel Oil: High-Efficiency Boiler	12,340	177	850	1,027
	Electricity: Space Heater	10,551	1,230	0	1,230
	Wood: Stove	58,614	0	6,283	6,283
	Wood: Stove with Biomass Carbon Credit	58,614	- 5,873	6,283	408

Unit of comparison: Energy consumption for one heating season (varies by region) (Note: This data is not intended for cross-regional comparison. Each region's results should be examined separately due to inherent differences in applications across regions)

Residential water heating

While there is substantial regional variation in both water heating technologies and their application, all regions tend to rely on central and/or point-of-use systems for their water heating needs. Central residential water heating heats all of a household's water from one source, while point-of-use heaters are used to heat water for independent needs like dishwashing, hand washing, and showering. A wide variety of technologies are used in each region for these two types of water heating, including:



- **Storage tank** – Maintains a readily available reservoir of hot water
- **Instantaneous (“tankless” or “demand”)** – Heats water as it is supplied to the end-user
- **Combination or “combi” boilers** – Water is heated by a space heating boiler system
- **Solar thermal** – Fluid absorbs solar energy in a collector; common designs use electricity to circulate fluid and connect the system to a conventional heater for cloudy days
- **Electric heat pump (Japan)** – Use electricity to move heat rather than directly generating heat

There are many design features that impact energy consumption of a water heater. For example, the ignition mechanism of gas water heaters can impact the energy use of small units, while instantaneous water heaters with electronic temperature control have an efficiency advantage over heaters that control temperature hydraulically.

MARKET DATA







While gas and electricity are popular fuels for water heating in every region, the use of fuel oil for water heating is significant in North America and Japan. Solar water heaters have a substantial market share in India and South America, where abundant solar energy makes this technology cost-effective, but are also gaining significant market share Europe and Japan. Electric heat pumps water heaters are rare in most regions, but are being aggressively subsidized in Japan.

Europe	<ul style="list-style-type: none"> • gas-fired combination boilers • electric storage heaters 	<ul style="list-style-type: none"> • instantaneous heaters (gas or electric) • small electric storage heaters
India	<ul style="list-style-type: none"> • solar thermal systems • electric storage heaters 	<ul style="list-style-type: none"> • instantaneous heaters (gas or electric) • small electric storage heaters
Japan	<ul style="list-style-type: none"> • large dedicated instantaneous gas heaters 	<ul style="list-style-type: none"> • bathtub heaters (common household appliance)
North America	<ul style="list-style-type: none"> • dedicated gas-fired storage heaters 	
Republic of Korea	<ul style="list-style-type: none"> • instantaneous (gas or electric) • solar thermal 	
South America	<ul style="list-style-type: none"> • solar thermal • electric storage heaters 	<ul style="list-style-type: none"> • instantaneous water heaters (gas or electric) • small electric storage heaters

KEY ASSUMPTIONS





1. Water heating performance in North America is based on government-mandated minimum energy performance standards in the United States.
2. Water heating performance in Europe and Japan is based on the estimated energy efficiency of the existing stock of water heaters.^{1,2}
3. Water heating technologies in Korea were assumed to have the same performance of Japanese water heaters.
4. Solar water heaters were assumed to employ backup water heating for 15% of the hot water load in India and South America, and 40% in Europe, Japan, and Korea.
5. LP Gas water heaters was assumed to be 3% more efficient than natural gas water heaters.³

ENERGY USE AND GHG EMISSIONS: CENTRAL WATER HEATING*

	Fuel/ Technology	Energy Use (kWh/yr)	Upstream GHGs(kg CO2e)		End-Use GHGs (kg CO2e)	Total GHGs (kg CO2e)	
			West	East		West	East
 Europe	Solar, pumped w/ LP Gas combination backup	1,407	90	113	285	375	397
	Electric instant, electronic temp control	1,352	507	826	0	507	826
	Electric instant, hydraulic temp control	1,556	584	951	0	584	951
	Natural Gas instant	3,057	136		563	699	
	Electric storage	1,902	West 714	East 1163	0	West 714	East 1163
	Natural Gas instant combination boiler	3,379	150		622	772	
	LP Gas instant	3,015	126		654	780	
	LP Gas instant combination boiler	3,281	137		711	848	
 India	Pumped solar w/ LP Gas instant backup	5,11	115		90	205	
	Natural Gas instant, electronic ignition	2,853	127		525	653	
	LP Gas instant, electronic ignition	2,770	125		601	725	
	Natural Gas instant, pilot ignition	4,109	183		756	940	
	LP Gas instant, pilot ignition	4,042	182		877	1059	
 Japan	Pumped solar w/ LP Gas instant backup	1,353	94		273	367	
	Electric Heat Pump	1,066	509		0	509	
	Natural Gas instant	3,239	192		596	789	
	LP Gas instant	3,145	123		682	805	
	Oil instant	3,083	151		788	939	
 N. America	Natural Gas instant	4,127	152		760	911	
	Natural Gas storage	4,195	154		772	926	
	LP Gas storage	4,073	158		883	1041	
	LP Gas instant	4,127	160		895	1055	
	Fuel oil storage	4,828	286		1234	1520	
	Electric storage	2,843	1633		0	1633	
 Korea	Pumped solar w/ NG instant backup	1,391	121		239	360	
	Pumped solar w/ LP Gas instant backup	1,353	93		273	366	
	Natural Gas instant	3,239	192		596	789	
	LP Gas instant	3,145	122		682	804	
	Oil instant	3,083	154		788	942	
 S. America	Pumped solar w/ LP Gas instant backup	511	56		90	146	
	Natural Gas instant, electronic ignition	2,853	124		525	649	
	LP Gas instant, electronic ignition	2,770	110		601	711	
	Electric storage	1,957	821		0	821	
	Natural Gas instant, pilot ignition	4,109	178		756	935	
	LP Gas instant, pilot ignition	4,042	161		877	1037	
	Natural Gas storage	7,553	328		1391	1718	
	LP Gas storage	7,333	291		1590	1882	

*Energy Use in kWh per year. Upstream, Downstream, and Total Emissions in kg CO₂-equivalent per year. (Note: This data is not intended for cross-regional comparison. Each region's results should be examined separately due to inherent differences in applications across regions.)

ENERGY USE AND GHG EMISSIONS: POINT-OF-USE WATER HEATING*

	Fuel/ Technology	Energy Use (kWh/yr)	Upstream GHGs (kg CO ₂ e)		End-Use GHGs (kg CO ₂ e)	Total GHGs (kg CO ₂ e)	
			West	East		West	East
 Europe	Electric instant, electronic temp control	542	203	332	0	203	332
	Electric instant, hydraulic temp control	615	231	376	0	231	376
	Natural Gas instant, electronic ignition	1,281	57		236	293	
	LP Gas instant, electronic ignition	1,243	52		270	322	
	Electric storage	878	West 329	East 537	0	West 329	East 537
 India	Natural Gas instant, electronic ignition	900	40		166	206	
	LP Gas instant, electronic ignition	873	39		189	229	
	Electric instant, electronic temp control	434	439		0	439	
	Electric instant, hydraulic temp control	492	497		0	497	
	Electric storage	702	711		0	711	
 Japan	Natural Gas instant bathtub heater	1,712	58		315	373	
	LP Gas instant bathtub heater	1,662	78		360	439	
	Oil instant bathtub heater	1,945	127		497	624	
 S. America	Electric instant, electronic temp control	434	182		0	182	
	Natural Gas instant, electronic ignition	900	39		166	205	
	Electric instant, hydraulic temp control	492	206		0	206	
	LP Gas instant, electronic ignition	873	35		189	224	
	Electric storage	641	269		0	269	

*Energy Use in kWh per year. Upstream, Downstream, and Total Emissions in kg CO₂-equivalent per year. (Note: This data is not intended for cross-regional comparison. Each region's results should be examined separately due to inherent differences in applications across regions.)

NOTES

- ¹ Average *system* efficiency of European water heaters (also applied to Indian and South American heaters) is based on analysis contained in VHK 2007.
- ² Japan's voluntary Top Runner program bases efficiency targets on a percent improvement from estimated efficiency of existing stock in 2000.
- ³ A survey of manufacturer specifications indicates that LP Gas water heaters are on average 3-5% more efficient than natural gas water heaters. The lower end of the range is assumed as a conservative estimate and is applied to reported efficiencies for gas water heaters.
- ⁴ Demand assumptions for central water heating: North America, Japan, and Korea – 2560 kWh per year of useful heating per household. Europe – 1280 kWh per year. India and South America – 1160 kWh per year.
- ⁵ Average of pilot and electronic ignition shown for Europe due to small (<2%) difference in results. Non-specificity of ignition type in data for other regions. India and South America have larger differences between results since smaller units can be used for the same flow rate (due to a lower ΔT).
- ⁶ Demand assumptions for point-of-use water heating: Europe – 460 kWh per year of useful heating per household. India and South America – 400 kWh per year. Japan (bathtub heating) – 1280 kWh per year.

APPENDIX – ASSUMPTIONS AND REFERENCES

UPSTREAM EMISSIONS

REFERENCES

Brazilian Government Ministry of Science and Technology. 2002. “Carbon Dioxide and Methane Emissions from Brazilian Hydroelectric Reservoirs.” *First Brazilian Inventory of Anthropogenic Greenhouse Gas Emissions: Background Reports*. Prepared by Alberto Luiz Coimbra Institute for Graduate Studies and Research (COPPE), International Virtual Global Change Institute (IVIG), and COPPE Energy Planning Program (PPE). Brazil: Brazilian Government Ministry of Science and Technology.

Delucchi, Mark A. 2003. *A Lifecycle Emissions Model(LEM): Lifecycle Emissions from Transportation Fuels, Motor Vehicles, Transportation Modes, Electricity Use, Heating and Cooking Fuels, and Materials* (December). Davis, CA: Institute of Transportation Studies, University of California, Davis.

U.S. Department of Energy. 1999. *Methodology, Development, Use, and Results*. Vol. 1 of *REET 1.5 – Transportation Fuel-Cycle Model* (August). Prepared by M.Q. Wang, Center for Transportation Research, Argonne National Laboratory. Washington, DC: U.S. Department of Energy.

World LP Gas Association (WLPGA). 2007. *Statistical Review of Global LP Gas*. Prepared by MCH Oil & Gas Consultancy. Paris: WLPGA.

ASSUMPTIONS

Upstream emissions were calculated for each region by identifying the upstream parameters which most significantly affected total upstream emissions, and inputting those parameters into a publicly available lifecycle emissions spreadsheet model with region-specific data (REET version 1.8). Key model parameters for feedstock recovery, processing, and transport were changed to reflect the technology, resource characteristics, operational efficiency, and infrastructure of the region being modeled. Table X lists the unique input parameters for each region and the data sources used to obtain regional parameter values. For regions importing a significant (>5%) amount of a given fuel, parameter values were weighted according to the values for the region(s) of fuel origin when appropriate. In some cases (such as for imported LP Gas and imported LNG), more than one regional model was created in order to accurately calculate the upstream emissions of both imported and domestically-produced fuel. Sources for import data included the International Energy Agency’s Statistics division (cite), the U.S. Energy Information Administration’s International Energy Annual (cite), and the WLPGA’s Statistical Review of LP Gas (cite). Values for parameters not listed in the table below were the default parameters used in the original model. Unchanged parameters include those governing the production of biofuels in both North and South America.

	Parameter	Data Source
Oil Production	% Crude oil imported	IEA
	CH ₄ flared in domestic oil recovery	Delucchi
	CH ₄ flared in imported oil recovery	Delucchi
	Vented and fugitive CH ₄ released during oil recovery	Delucchi
	Crude recovery efficiency	Delucchi
	Petrol refining efficiency	Delucchi
	Reformulated petrol refining efficiency	Delucchi
	Diesel refining efficiency	Delucchi
	Low sulfur diesel refining efficiency	Delucchi

Oil Production	LP Gas refining efficiency	Delucchi
	% of petroleum transported by ocean tanker	Delucchi
	miles transported by ocean tanker	estimated
	Petrol oxygenate type	various
	Petrol oxygenate content (O2 content by weight)	various
	% share low sulfur diesel	various
	% share reformulated petrol	various
	Reformulated petrol oxygenate type	various
	Reformulated petrol oxygenate content (O2 content by weight)	various
Natural Gas Production	% natural gas imported via LNG	IEA
	Fugitive CH4 from domestic NG recovery	Delucchi
	Fugitive CH4 from imported NG recovery	Delucchi
	Fugitive CH4 from domestic NG processing	Delucchi
	Fugitive CH4 from imported NG processing	Delucchi
	Fugitive CH4 from domestic NG transmission, storage, and distribution	Delucchi
LP Gas Production	% LP Gas production from natural gas	WLPGA, IEA
	% LP Gas imported	WLPGA
	% LP Gas production from natural gas, import regions	WLPGA, IEA
Electricity Production	Carbon dioxide emissions per kWh delivered electricity, domestic	WRI
	Carbon dioxide emissions per kWh delivered electricity, oil import regions	WRI
	Electricity generation fuel mix, domestic	IEA
	Electricity generation fuel mix, imported oil regions	IEA
	Transmission and distribution losses (%), domestic	IEA
	Transmission and distribution losses (%), imported oil regions	IEA
Fuel Transportation	Transportation mode shares	various
	Transportation mode distances	estimated

COOKING

REFERENCES

- Carniero de Miranda, R. 1998. "Forest replacement schemes in Latin America: An effective model to achieve sustainability of supply for industrial fuelwood consumers." *Unasylva* 192. Rome: Food and Agriculture Organization (FAO) of the United Nations. <http://www.fao.org/docrep/w7126e/w7126e0a.htm> (accessed May 2008).
- Electronic Code of Federal Regulations (e-CFR). 2008. *Appendix I to Subpart B of Part 430—Uniform Test Method for Measuring the Energy Consumption of Conventional Ranges, Conventional Cooking Tops, Conventional Ovens, and Microwave Ovens* (May 7). Washington, DC: U.S. Government Printing Office (GPO). <http://ecfr.gpoaccess.gov/cgi/t/text/text-idx?c=ecfr;sid=76a0c2194d8b367d90c6fd26fe702502;rgn=div5;view=text;node=10%3A3.0.1.4.16;idno=10;cc=ecfr#10:3.0.1.4.16.2.9.7.9> (accessed May 2008).
- Energy Information Administration. 2007. *Emissions of Greenhouse Gas Report* (November): Appendix H of the instructions to Form EIA-1605. DOE/EIA-0573(2006). http://www.eia.doe.gov/oiaf/1605/excel/Fuel%20EFs_2.xls (accessed May 2008).
- European Commission Institute for Environment and Sustainability. 2007. *Electricity Consumption and Efficiency Trends in the Enlarged European Union: Status report 2006*. Prepared by Paolo Bertoldi and Bogdan Atanasiu. Italy: European Communities.
- Intergovernmental Panel on Climate Change (IPCC). 2006. *Energy*. Vol. 2 of *2006 IPCC Guidelines for National Greenhouse Gas Inventories*. Prepared by the National Greenhouse Gas Inventories Programme, ed. Eggleston H.S., Buenida L., Miwa K., Ngara T., and Tanabe K. Japan: IPCC. <http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html> (accessed May 2008).
- Intergovernmental Panel on Climate Change (IPCC). 1996. *Technologies, Policies and Measures for Mitigating Climate Change*. Ed. Robert T. Watson, Marafu C. Zinyowera, and Richard H. Moss. IPCC.
- International Energy Agency (IEA). 2006. *World Energy Outlook 2006*. Paris: Organisation for Economic Co-operation and Development (OECD)/IEA.
- International Energy Initiative (IEI). 2004. *Report on the use of LPG as a domestic cooking fuel option in India* (June). Prepared by Antonette D'Sa and K.V. Narasimha Murthy. Bangalore: IEI.
- Lebot, Benoit, Alan Meier and Alain Anglade. 2000. "Global Implications of Standby Power Use." *Proceedings of ACEEE Summer Study on Energy Efficiency in Buildings*. Asilomar: American Council for An Energy Efficient Economy. Also published as Lawrence Berkley National Laboratory Report LBNL-26019 (June 2000).
- Ramakrishna, K., L. Jacobsen, R. Thomas, E. Woglom, and G. Zubkova. 2003. "Country Case Study: India." *Action Versus Words: Implementation of the UNFCCC by Select Developing Countries* (February). Woods Hole, MA: The Woods Hole Research Center.
- Roggema, Paul. 2006. "Energy Saving in Gas Cooking." *Appliance Magazine* (June). <http://www.appliancemagazine.com/editorial.php?article=1431&zone=208&first=1> (accessed May 2008).
- Smith, Kirk R., R. Uma, V.V.N. Kishore, Junfeng Zhang, V. Joshi, M.A.K. Khalil. 2000. "Greenhouse Implications of Household Stoves: An Analysis for India." *Annual Review of Energy and the Environment*, no. 25 (November): 741-763.
- United Nations Department of Economic and Social Affairs. 1999. *Trends in Consumption and Production: Household Energy Consumption* (April). Prepared by Oleg Dziuobinski and Ralph Chipman. A Discussion Paper of the United Nations Department and Social Affairs, New York.
- United States Agency International Development (USAID). 1997. *Fuel Efficient Stove Programs in IDP Settings – Summary Evaluation Report, Uganda* (September). Prepared by the Academy for Educational Development (AED). Washington, DC: AED.
- U.S. Department of Energy Office of Codes and Standards. 1996. *Potential Impact of Alternative Efficiency Levels for Residential Cooking Products*. Vol. 2 of *Technical Support Document for Residential Cooking*

Products. Prepared by Lawrence Berkley National Laboratory. Berkley, CA: Lawrence Berkley National Laboratory.

U.S. Environmental Protection Agency (EPA) Office of Air and Radiation. 2000. *Greenhouse Gases from Small-Scale Combustion Devices in Developing Countries: Phase IIA – Household Stoves in India* (June). Prepared by National Risk Management Research Laboratory. Washington, DC: EPA. EPA/600/R-00/052.

World LP Gas Association (WLPGA). 2005. *Household Fuels and Ill-Health in Developing Countries: What improvements can be brought by LP Gas?* Prepared by Kirk R. Smith, Jamesine Rogers, and Shannon C. Cowlin of the University of California, Berkley. Paris: WLPGA.

DISTRIBUTED GENERATION

REFERENCES

Armstrong Power Systems. 2006. "Wide range of electric generators available." Gas product list. <http://www.armstrongpower.com/products/gas.htm> (accessed May 2008).

Armstrong Power Systems. 2006. "Wide range of electric generators available." Diesel product list. <http://www.armstrongpower.com/products/power.htm> (accessed May 2008).

Baldor. "Industrial Diesel Liquid Cooled Generators (IDLC) – Standby/Prime Power." <http://www.baldor.com/products/generators/idlc.asp> (accessed May 2008).

Baldor. "Industrial Gaseous Standby/Prime Power Generators (IGLC) – Industrial Gaseous Liquid Cooled." <http://www.baldor.com/products/generators/iglc.asp> (accessed May 2008).

Caterpillar. "Spec Sheets: CAT Gensets Powered by CAT engines, Olympian Gensets Available from your CAT Dealer." <http://www.cat.com/cda/layout?m=39280&x=7> (accessed May 2008).

Cummins Power Generation. "Generator Sets: Spark-ignited Gas Generator Sets." <http://cumminspower.com/na/products/generators/sparkignited#results> (accessed May 2008).

FG Wilson. "10 to 30 kVA." Gas generator set models. <http://www.fgwilson.com/cda/layout?m=147961&x=7> (accessed May 2008).

Generac Power Systems, Inc. "Home Standby Air-Cooled Spec Sheets." <http://www.generac.com/Products/Residential/AirCooled/SpecSheets.aspx> (accessed May 2008).

Intergovernmental Panel on Climate Change (IPCC). 2006. *Energy*. Vol. 2 of *2006 IPCC Guidelines for National Greenhouse Gas Inventories*. Prepared by the National Greenhouse Gas Inventories Programme, ed. Eggleston H.S., Buendia L., Miwa K., Ngara T., and Tanabe K. Japan: IPCC. <http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html> (accessed May 2008).

Kohler Power. "Residential Power: All Residential Generators." Product list. <http://www.kohlerpower.com/residential/filterresults.htm?categoryNumber=13061§ionNumber=13561> (accessed May 2008).

Kohler Power. "Industrial Power: All Gas Generators." Product list. <http://www.kohlerpower.com/industrial/filterresults.htm?categoryNumber=12061§ionNumber=13261> (accessed May 2008).

Lareya, Nathan. 2008. "Gen-sets: A Transition from Industrial to Commercial Use?" (April 4). Frost & Sullivan Market Insight. <http://www.frost.com/prod/servlet/market-insight-print.pag?docid=126684096> (accessed May 2008).

McNeely, Mark. 2007. "31st Power Generation Order Survey." *Diesel & Gas Turbine Worldwide* (October). http://www.diesलगasturbine.com/pdf/power_2007.pdf (accessed May 2008).

Power Systems Research. 2005. *PowerTracker Dealer/Distributor Survey* (November 23). <http://www.powersys.com/pdf/DealerSampleReport.pdf> (accessed May 2008).

ASSUMPTIONS

1. Energy use is based on manufacturer specifications (specs) for power-only (no CHP) gensets operating at 1800 rpm for 60 Hz output and at 1500 rpm for 50 Hz output and 100% nameplate load.

2. Manufacturer specs used to calculate energy use is based on over 150 commercially available units that contained adequate data and were available in regions of interest. A full list of manufactures and models analyzed is provided in the table below.

Make	Model	kW	Fuel	HZ	Prime/Stby
Caterpillar	GEP13.5-2	10	Diesel	50	Prime
Caterpillar	GEP13.5-2	11	Diesel	50	Standby
Olympian	G12U3	11	LPG	60	Prime
Olympian	G12U3	11	Nat Gas	60	Prime
Olympian	GEUG16-1	11.5	Nat Gas	50	Prime
Caterpillar	D13-2	12	Diesel	60	Prime
Caterpillar	GEP13.5-2	12	Diesel	60	Prime
Olympian	G12U3	12	LPG	60	Standby
Olympian	G12U3	12	Nat gas	60	Standby
Olympian	GEUG16-1	12.8	LPG	50	Prime
Caterpillar	D13-2	13	Diesel	60	Standby
Caterpillar	GEP13.5-2	13	Diesel	60	Standby
Olympian	GEUG16-1	13.7	Nat gas	50	Standby
Olympian	GEUG16-1	15	Nat gas	60	Standby
Olympian	GEUG16-1	15	LPG	50	Standby
Olympian	GEUG16-1	15.8	LPG	60	Prime
Olympian	GEUG16-1	15.8	Nat Gas	60	Prime
Olympian	GEUG16-1	16	LPG	60	Standby
Cummins	C30 D6	24	Diesel	50	Prime
Cummins	C33 D5	24	Diesel	50	Prime
Cummins	GGFE	25	Nat Gas	50	Prime
Cummins	GGMC	25	Nat Gas	50	Prime
Kohler	30REOZJB	26	Diesel	50	Standby
Kohler	30RZG (alt. 4P5W)	26	LPG	50	Standby
Kohler	30RZG (alt. 4P5W)	26	Nat gas	50	Standby
Cummins	GGMC	26	LPG	60	Prime
Cummins	GGMC	26	Nat Gas	60	Prime
Kohler	30REOZJB	26	Diesel	50	Prime
Kohler	30RZG	26	LPG	50	Prime
Kohler	30RZG	26	Nat Gas	50	Prime
Cummins	C30 D5	26.4	Diesel	50	Standby
Armstrong	AGM30Si	27	Nat Gas	60	Prime
Armstrong	A30PE	27	Diesel	60	Prime
Caterpillar	D30-8	27	Diesel	60	Prime
Cummins	C30 D6	27	Diesel	60	Prime
Olympian	G30F3	27	LPG	60	Prime
Olympian	G30F3	27	Nat Gas	60	Prime
Armstrong	AGM30Si	29	LPG	60	Prime
Cummins	GGMC	29	Nat gas	60	Standby
Armstrong	AGM30Si	30	Nat gas	60	Standby
Caterpillar	D30-8	30	Diesel	60	Standby
Cummins	C30 D5	30	Diesel	60	Standby
Cummins	GGFE	30	Nat gas	50	Standby
Cummins	GGMC	30	LPG	60	Standby
Cummins	GGMC	30	LPG	60	Standby
Olympian	G30F3	30	LPG	60	Standby
Olympian	G30F3	30	Nat gas	60	Standby
Cummins	DGGD	30	Diesel	60	Prime
Cummins	GGFE	30	LPG	50	Prime
Cummins	GGMC	30	LPG	50	Prime
Armstrong	AGM30Si	32	LPG	60	Standby
Kohler	30REOZJB	33	Diesel	60	Prime
Kohler	30RZG	33	LPG	60	Prime
Kohler	30RZG	33	Nat Gas	60	Prime
Kohler	45RES	33	Nat gas	50	Standby
Cummins	DGGD	35	Diesel	60	Standby
Cummins	GGFE	35	LPG	50	Standby
Kohler	30REOZJB	35	Diesel	60	Standby
Kohler	30RZG (alt. 4P5W)	35	Nat gas	60	Standby
Kohler	40REOZJB	35	Diesel	50	Standby
Olympian	GEP44-2	35.2	Diesel	50	Standby
Kohler	45RES	36	LPG	50	Standby
Armstrong	AGM45Si	40	Nat gas	60	Standby
Cummins	DGBC	40	Diesel	60	Standby
Generac	SD040	40	Diesel	60	Standby
Generac	SD040	40	Diesel	50	Standby
Kohler	40REOZJB	40	Diesel	60	Standby
Olympian	D40-4	40	Diesel	60	Standby
Olympian	GEP44-2	40	Diesel	60	Standby
Kohler	45RES	41	Nat gas	60	Standby
Cummins	GGFE	42	Nat gas	60	Standby
Cummins	C55 D5	44	Diesel	50	Standby
Armstrong	A45PE	45	Diesel	60	Standby
Armstrong	AGM45Si	45	LPG	60	Standby
Generac	QT045	45	LPG	60	Standby
Generac	QT045	45	Nat gas	60	Standby
Kohler	60REOZJC	45	Diesel	50	Standby
Kohler	45RES	46	LPG	60	Standby
Cummins	GGFE	47	LPG	60	Standby
Kohler	60RES	49	Nat gas	50	Standby
Kohler	60RES	51	LPG	50	Standby
Olympian	GEP65-2	52	Diesel	50	Standby
Cummins	GGHF	55	Nat gas	50	Standby
Generac	QT055	55	LPG	60	Standby
Generac	QT055	55	Nat gas	60	Standby
Cummins	DGCB	56	Diesel	50	Standby
Cummins	C80 D5	58	Diesel	50	Prime
Armstrong	AGM60Si	60	Nat gas	60	Standby
Cummins	DGCB	60	Diesel	60	Standby
Cummins	GGHE	60	Nat gas	60	Standby
Cummins	GGHF	60	LPG	60	Standby
Cummins	GGHF	60	Nat gas	60	Standby
Cummins	GGHF	60	LPG	50	Standby
Generac	SD060	60	Diesel	60	Standby
Generac	SD060	60	Diesel	50	Standby
Kohler	60REOZJC	60	Diesel	60	Standby
Kohler	60RES	60	Nat Gas	60	Standby
Olympian	D60-4	60	Diesel	60	Standby
Kohler	60RES	60	Nat Gas	50	Prime
Armstrong	AGM60Si	62	LPG	60	Standby
Kohler	60REOZJC	62	Diesel	50	Prime
Kohler	60RES	63	LPG	60	Standby
Olympian	G80-F3	63.5	Nat Gas	60	Prime
Cummins	C80 D5	64	Diesel	50	Standby
Kohler	60RES	64	LPG	50	Prime
Kohler	60RES (alt. 4S7W)	66	Nat gas	50	Standby
Olympian	G80-F3	68	LPG	60	Prime
Kohler	60REOZJC	70	Diesel	50	Standby
Kohler	60RES (alt. 4S7W)	70	LPG	50	Standby
Armstrong	A80PE	72	Diesel	60	Prime
Caterpillar	D80-6	72	Diesel	60	Prime
Kohler	60REOZJC	72	Diesel	60	Prime
Kohler	60RES	72	LPG	60	Prime
Kohler	60RES	72	Nat Gas	60	Prime
Armstrong	AGM80Si	73	LPG	60	Prime
Armstrong	AGM80Si	73	Nat Gas	60	Prime
Baldor	IGLC150N/L-CB	73	Nat Gas	50	Prime
Kohler	100RZG	73	Nat Gas	50	Prime
Olympian	G80F3	75	Nat Gas	60	Standby
Armstrong	A80PE	80	Diesel	60	Standby
Armstrong	AGM80Si	80	LPG	60	Standby
Armstrong	AGM80Si	80	Nat gas	60	Standby
Baldor	IDLC150-3J	80	Diesel	50	Prime
Baldor	IGLC150N/L-CB	80	LPG	50	Prime
Caterpillar	D80-6	80	Diesel	60	Standby
Cummins	C80 D5	80	Diesel	60	Standby
Kohler	100 RZG (alt. 4S13V)	80	Nat gas	50	Standby
Kohler	100REOZJC	80	Diesel	50	Prime
Kohler	100RZG	80	LPG	50	Prime
Kohler	60REOZJC	80	Diesel	60	Standby
Kohler	60RES (alt. 4S7W)	80	LPG	60	Standby
Kohler	60RES (alt. 4S7W)	80	Nat gas	60	Standby
Olympian	G80F3	80	LPG	60	Standby
FG Wilson	P100P2	80.4	Diesel	50	Prime
Armstrong	AGM100Si	81	Nat Gas	60	Prime
FG Wilson	P110E2	88	Diesel	50	Standby
Kohler	100 RZG (alt. 4S13V)	88	LPG	50	Standby
Kohler	100REOZJC (alt. 4S)	88	Diesel	50	Standby
Armstrong	A100PE	89	Diesel	60	Prime
Kohler	100REOZJC	90	Diesel	60	Prime
Armstrong	AGM100Si	91	LPG	60	Prime
Armstrong	AGM100Si	91	Nat gas	60	Standby
Kohler	100RZG	91	LPG	60	Prime
Kohler	100RZG	91	Nat Gas	60	Prime
Armstrong	AGM100Si	100	LPG	60	Standby
Baldor	IGLC150N/L-CB	100	LPG	50	Prime
Kohler	100 RZG (alt. 4S13V)	100	LPG	60	Standby
Kohler	100 RZG (alt. 4S13V)	100	Nat gas	60	Standby
Kohler	100REOZJC (alt. 4S)	100	Diesel	60	Standby
Kohler	150RZGB (alt. 4S13)	125	Nat gas	50	Standby
Baldor	IGLC150N/L-CB	125	LPG	60	Prime
Kohler	150REOZJC (alt. 4S)	132	Diesel	50	Standby
Baldor	IGLC150N/L-CB	135	Nat Gas	60	Prime
Baldor	IDLC150-3J	140	Diesel	60	Prime
Baldor	IDLC150-3J	140	Diesel	50	Prime
Cummins	C200 D5S	148	Diesel	50	Prime
Baldor	IDLC150-3J (alt. UCI)	150	Diesel	60	Standby
Baldor	IGLC215N/L-CB	150	LPG	50	Prime
Baldor	IGLC215N/L-CB	150	Nat Gas	50	Prime
Kohler	150REOZJC (alt. 4S)	150	Diesel	60	Standby
Kohler	150RZGB (alt. 4S13)	150	Nat gas	60	Standby

3. Different manufacturers provide different energy use requirements for generator set ratings. Statistical log-linear regression of genset data of a given power frequency and size were used to estimate energy end use.
4. Gensets fuel usage for North America, South America, and Korea are based on 60 Hz power. Europe, India, and Japan are based on 50 Hz power.
5. CO2-equivalent emissions factors are based on default values reported by IPCC for stationary combustion in residential sector applications applicable throughout the world. Emissions factors include CO2, CH4, and N2O emissions assuming complete oxidation of the carbon contained in the fuel (carbon oxidation factor equal to 1). Emission factors assume steady and optimal conditions and do not account for start-ups, shut downs or combustion with partial loads (IPCC 2006). Emission

factors for CH₄ and N₂O are based on IPCC expert judgment and uncertainty ranges are set at +/- factor of 3. Post-combustion emissions of CH₄ and N₂O are less than 1% of the total emissions (on a carbon-equivalent basis) for natural gas, LP Gas, and diesel in stationary combustion applications.

6. Actual emissions vary significantly based on fuel type, combustion technology, operating conditions, control technology, quality of maintenance, and age of combustion equipment. Fuel usage in this study is based on performance at manufacturer-specified conditions and ratings.
7. Energy use is based on gensets operating at an elevation below 500 m and at 25°C (LP Gas vaporizers are not necessary). Energy use increases about 4% for spark-engine (LP Gas and natural gas) generators operating above 1000 m, and 1% per every 5°C above 40°C. For diesel gensets, energy use increases about 4% for every 300 m above 500 m, and 2% per every 11°C above 25°C (Cummins 2008).
8. Upstream emissions are based on region-specific factors applied to the Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation model (GREET 2007).

RESIDENTIAL SPACE HEATING

REFERENCES

- Euroheat & Power. 2006. *Ecoheatcool Work Package 1: The European Heat Market (Final Report)*. Brussels, Belgium: Ecoheatcool and Euroheat & Power.
- European Commission Altener Programme. 2003. *Benchmarking for Existing European Dwellings*. Task 1 of *Energy Performance Assessment Method for Existing Dwellings (EPA-ED)*. (April). Prepared by C.A. Balaras, E. Dascalaki, S. Geissler, K.B. Wittchen, and G. van Cruchten. Athens, Hellas: European Commission.
- European Commission BOILeff project. 2008. *Summary report on studies and field test reports dealing with boiler efficiency in practice*. Deliverable 2.1 of *Raising the efficiency of boiler installations*. Prepared by CREVER – Universitat Rovira I Virgili. European Commission.
- European Commission DG for Energy and Transport Save II Action. 2002. *Labelling and other measures for heating systems in dwellings: Final Technical Report* (January). European Commission.
- Hayden, Skip. 2006. *Heating System Choices & Installation: Maximizing Comfort and Efficiency*. Burlington, VT: Better Buildings by Design 2006 (February). PowerPoint slides.
- Intergovernmental Panel on Climate Change (IPCC). 2006. *Energy*. Vol. 2 of *2006 IPCC Guidelines for National Greenhouse Gas Inventories*. Prepared by the National Greenhouse Gas Inventories Programme, ed. Eggleston H.S., Buenida L., Miwa K., Ngara T., and Tanabe K. Japan: IPCC. <http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html> (accessed May 2008).
- United Nations Department of Economic and Social Affairs. 1999. *Trends in Consumption and Production: Household Energy Consumption* (April). Prepared by Oleg Dziuobinski and Ralph Chipman. A Discussion Paper of the United Nations Department and Social Affairs, New York.
- U.S. Department of Energy Office of Energy Efficiency and Renewable Energy (EERE). Prepared by Roger Taylor of National Renewable Energy Laboratory (NREL). *Residential Wood Heating Economics*. NAEMI Biomass Training Workshop. PowerPoint slides.

RESIDENTIAL WATER HEATING

REFERENCES

ECOHOTWATER. 2007. "Water Heater Model Draft v.2." (May 9).

Alibaba Group. 2008. Homepage. www.alibaba.com (accessed May 2008).

European Commission. 2007. *Preparatory Study on Eco-design of Water Heaters: Task 5 Report (Final) – Definition of Basecase* (September 30). Prepared by René Kemna, Martijn van Elburg, William Li, and Rob van Holsteijn of Van Holsteijn en Kemna BV (VHK). Delft, Holland: VHK.

European Commission. 2007. *Preparatory Study on Eco-design of Water Heaters: Task 6 Design Options(Final)* (September 30). Prepared by René Kemna, Martijn van Elburg, William Li, and Rob van Holsteijn of Van Holsteijn en Kemna BV (VHK). Delft, Holland: VHK.

European Commission. 2006. *Preparatory Study on Eco-design of Water Heaters: Task 1 Report – Definition, Test Standards, Current Legislation & Measures (Draft)* (December 3). Prepared by René Kemna, Martijn van Elburg, William Li, and Rob van Holsteijn of Van Holsteijn en Kemna BV (VHK). Delft, Holland: VHK.

Indiasolar.com. "Survey on Solar Water Heater Uses." <http://www.indiasolar.com/survey-swh.htm> (accessed May 2008).

Intergovernmental Panel on Climate Change (IPCC). 2006. *Energy*. Vol. 2 of *2006 IPCC Guidelines for National Greenhouse Gas Inventories*. Prepared by the National Greenhouse Gas Inventories Programme, ed. Eggleston H.S., Buenida L., Miwa K., Ngara T., and Tanabe K. Japan: IPCC. <http://www.ipcc-nggip.iges.or.jp/public/2006gl/index.html> (accessed May 2008).

Pillai, Indu R. and Banerjee Rangan. 2006. *Impact of Hot Water Usage Pattern and Location on Economics of Solar Water Heating Systems*. Bombay, India: Energy Systems Engineering, Indian Institute of Technology.

http://www.me.iitb.ac.in/~rangan/publications/recent%20papers%20published_homepage/Solar%20paper.pdf (accessed May 2008).

ASSUMPTIONS

1. An extensive study of water heaters in the EU ("Eco-design of water heaters"), conducted by the Netherlands consulting firm VHK, was used to obtain many of the parameters in the analysis.
2. Efficiencies for water heaters in Europe, India, and South America were based on modeled and tested system efficiencies of water heaters in the "base case" reported in VHK 2007a). Currently, each country in the EU has independent efficiency standards for water heaters.
3. Average efficiencies for North American water heaters were assumed to correspond to the United States minimum energy performance standards established for 2004. This was chosen to represent the typical performance of the existing stock of water heaters, reflecting a mix of sub-standard models purchased before 2004 as well as models that exceed the minimum standard.
4. Japanese water heater efficiencies were based on the performance of existing water heaters, which was inferred from the Japanese Top Runner program voluntary efficiency targets, which are based on a set percentage improvement from average efficiency in 2000. Each data source calculates efficiency differently. The U.S. government and the Japanese Top Runner program base minimum efficiency on a prescribed test procedure; the VHK study tends to include higher losses in its estimation of total system efficiency. Although some of the difference may be due to actual efficiency differences (such as the much more stringent standards for standby losses in the U.S. compared to Europe), *caution is advised in drawing conclusions from cross-regional comparisons of results*.
5. Size classes assigned in the VHK study were used to estimate heating energy demand in each region (the heating energy needed for useful hot water service after efficiency losses - see notes in main report for values). For Europe, the efficiencies of water heaters for central heating were based on the "medium" size class, which represented the largest number of water heating units sold in the EU.

Average storage size in the medium size class is 80 liters. The flow rate of instantaneous heaters in this size category is 6-8 l/min (corresponding to a power input of 21-27 kW). For North America, Japan, and Korea, heating demand for the “large” size class was used. Average storage size in the large size class is 120 liters, which agrees well with the average size of United States water heaters (EIA 2001). The flow rate of instantaneous heaters in the large size class is 10 l/min. The large size class was chosen for Japan based on the popularity of bathtub use in that country. The water heating demand of Korean households were assumed to be similar to Japan.

6. Heating demand for point-of-use heaters was assumed to correspond to the “small” size class in the VHK study. Average storage size in the small size class is 20 liters. The flow rate of small instantaneous heaters is 5 l/min.
7. Central water heater efficiencies for India and South America were based on the “medium” size class for storage heaters, but used efficiencies from the “small” size class for instantaneous heaters (18 kW) due to tendency in those regions for smaller water heaters to be used to match the same flow rate demanded by the medium size class (reflecting a lower temperature change, possibly due to a higher inlet temperature or a lower outlet temperature in those regions, or both). Similarly, efficiencies for instantaneous technologies in the “extra small” category were used to estimate energy consumption for meeting the “small” energy requirements for point-of-use applications in these regions.
8. A lower heating energy demand than used for other regions was assumed for India and South America due to higher ambient temperatures. The VHK model assumes a ΔT of 50 °C from inlet to outlet. A ΔT of 40 °C was assumed for India and South America. Total heating demand for those regions was therefore reduced by 20% from the heating energy requirement assigned to each respective size category in the VHK study.
9. The backup fraction for solar water heating applications was assumed to be 15% for India and South America, based on data presented in Pillai and Banerjee 2004. The backup fraction of 40% assumed for Europe, Japan, and Korea were based on typical backup fractions for solar water heaters in the United States (DOE 2005). (Solar water heaters were not analyzed for the United States due to a small market share relative to other regions.)
10. Efficiencies for small and extra small gas instantaneous, electronic ignition technologies were taken from efficiencies reported in the VHK design options study (VHK 2007b). The efficiency used for the medium gas instantaneous water heater was calculated using the VHK spreadsheet model (VHK 2008).
11. The relative market shares of water heating technologies in India and South America was gleaned from a number of different sources, in particular the global trade website alibaba.com, which indicates the number of different water heater types available by regional export market.

LIST OF ACRONYMS

AED	Academy for Educational Development
AFUE	Annual fuel utilization efficiency
CH ₄	Methane
CHP	Combined heat and power
COPPE	Coimbra Institute for Graduate Studies and Research
DOE	U.S. Department of Energy
E85	Corn-based ethanol
e-CFR	Electronic Code of Federal Regulations
EPA	U.S. Environmental Protection Agency
EPA-ED	Energy Performance Assessment Method for Existing Dwellings
EERE	U.S. Department of Energy Office of Energy Efficiency and Renewable Energy
EU	European Union
FAO	Food and Agriculture Organization
GHG	Greenhouse gas
GJ	gigajoule
REET	Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation Model
IDLC	Industrial Diesel Liquid Cooled Generators
IEA	International Energy Agency
IEI	International Energy Initiative
IGLC	Industrial Gaseous Standby/Prime Power Generators
IPCC	Intergovernmental Panel on Climate Change
IVIG	International Virtual Global Change Institute
LEM	Lifecycle Emissions Model
LNG	Liquid natural gas
LP Gas	Liquefied petroleum gas
N ₂ O	Nitrous oxide
NREL	National Renewable Energy Laboratory
OECD	Organisation for Economic Co-operation and Development
OEM	Original equipment manufacturer
PPE	COPPE Energy Planning Program
SUV	Sport utility vehicle
USAID	United States Agency International Development
VHK	Van Holsteijn en Kemna BV
VOC	Volatile organic compound
WLPGA	World LP Gas Association
WRI	World Resources Institute

GLOSSARY OF TERMS

Aerosols: Solid or liquid particles suspended within the atmosphere (see "sulfate aerosols" and "black carbon aerosols").

Afforestation: Planting of new forests on lands that have not been recently forested.

Anthropogenic Emissions: Emissions of greenhouse gasses resulting from human activities.

Annex I Parties: The 40 countries plus the European Economic Community listed in Annex I of the UNFCCC that agreed to try to limit their GHG emissions: Australia, Austria, Belarus, Belgium, Bulgaria, Canada, Croatia, Czech Republic, Denmark, European Economic Community, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Italy, Japan, Latvia, Liechtenstein, Lithuania, Luxembourg, Monaco, The Netherlands, New Zealand, Norway, Poland, Portugal, Romania, Russian Federation, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey, Ukraine, United States.

Baselines: The baseline estimates of population, GDP, energy use and hence resultant greenhouse gas emissions without climate policies, determine how big a reduction is required, and also what the impacts of climate change without policy will be.

Base Year: Targets for reducing GHG emissions are often defined in relation to a base year. In the Kyoto Protocol, 1990 is the base year for most countries for the major GHGs; 1995 can be used as the base year for some of the minor GHGs.

Basket of Gases: This refers to the group six of greenhouse gases regulated under the Kyoto Protocol. They are listed in Annex A of the Kyoto Protocol and include: carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulphur hexafluoride (SF₆).

Black Carbon Aerosols: Particles of carbon in the atmosphere produced by inefficient combustion of fossil fuels or biomass. Black carbon aerosols absorb light from the sun, shading and cooling the Earth's surface, but contribute to significant warming of the atmosphere (see "radiative forcing").

Bubble: An option in the Kyoto Protocol that allows a group of countries to meet their targets jointly by aggregating their total emissions. The member states of the European Union are utilizing this option.

Biodiversity: The variety of organisms found within a specified geographic region.

Capital Stock: Existing investments in energy plant and equipment that may or may not be modified once installed.

Carbon Dioxide (CO₂): CO₂ is a colorless, odorless, non-poisonous gas that is a normal part of the ambient air. Of the six greenhouse gases normally targeted, CO₂ contributes the most to human-induced global warming. Human activities such as fossil fuel combustion and deforestation have increased atmospheric concentrations of CO₂ by approximately 30 percent since the industrial revolution. CO₂ is the standard used to determine the "global warming potentials" (GWPs) of other gases. CO₂ has been assigned a 100-year GWP of 1 (i.e., the warming effects over a 100-year time frame relative to other gases).

Carbon Dioxide (CO₂) equivalent: The amount of carbon dioxide, by weight, emitted into the atmosphere that would produce the same estimated radiative forcing as a given weight of another radiatively active gas. Carbon dioxide equivalents are computed by multiplying the weight of the gas being measured (for example, methane) by its estimated global warming potential. "Carbon equivalent units" are defined as carbon dioxide equivalents multiplied by the carbon content of carbon dioxide (i.e., 12/44).

Carbon Sinks: Processes that remove more carbon dioxide from the atmosphere than they release. Both the terrestrial biosphere and oceans can act as carbon sinks.

Carbon Taxes: A surcharge on the carbon content of oil, coal, and gas that discourages the use of fossil fuels and aims to reduce carbon dioxide emissions.

Certified Emissions Reduction (CER): Reductions of greenhouse gases achieved by a Certified Development Mechanism (CDM) project. A CER can be sold or counted toward Annex I countries' emissions commitments. Reductions must be additional to any that would otherwise occur.

Chlorofluorocarbons (CFCs): CFCs are synthetic industrial gases composed of chlorine, fluorine, and carbon. They have been used as refrigerants, aerosol propellants, cleaning solvents and in the manufacture of plastic foam. There are no natural sources of CFCs. CFCs have an atmospheric lifetime of decades to centuries, and they have 100-year "global warming potentials" thousands of times that of CO₂, depending on the gas. In addition to being greenhouse gases, CFCs also contribute to ozone depletion in the stratosphere and are controlled under the Montreal Protocol.

Clean Development Mechanism (CDM): One of the three market mechanisms established by the Kyoto Protocol. The CDM is designed to promote sustainable development in developing countries and assist Annex I Parties in meeting their greenhouse gas emission reduction commitments. It enables industrialized countries to invest in emission reduction projects in developing countries and to receive credits for reductions achieved.

Climate: The long-term average weather of a region including typical weather patterns, the frequency and intensity of storms, cold spells, and heat waves. Climate is not the same as weather.

Climate change: Refers to changes in long-term trends in the average climate, such as changes in average temperatures. In IPCC usage, climate change refers to any change in climate over time, whether due to natural variability or as a result of human activity. In UNFCCC usage, climate change refers to a change in climate that is attributable directly or indirectly to human activity that alters atmospheric composition.

Climate Sensitivity: The average global air surface temperature change resulting from a doubling of pre-industrial atmospheric CO₂ concentrations. The IPCC estimates climate sensitivity at 1.5-4.5°C (2.7-8.1°F).

Climate Variability: Refers to changes in patterns, such as precipitation patterns, in the weather and climate.

Commitment Period: The period under the Kyoto Protocol during which Annex I Parties' GHG emissions, averaged over the period, must be within their emission targets. The first commitment period runs from January 1, 2008 to December 31, 2012.

Early Crediting: A provision that allows crediting of emission reductions achieved prior to the start of a legally imposed emission control period. These credits can then be used to assist in achieving compliance once a legally imposed system begins.

Ecosystem: A community of organisms and its physical environment.

Emissions: The release of substances (e.g., greenhouse gases) into the atmosphere.

Emissions Cap: A mandated restraint in a scheduled timeframe that puts a "ceiling" on the total amount of anthropogenic greenhouse gas emissions that can be released into the atmosphere. This can be measured as gross emissions or as net emissions (emissions minus gases that are sequestered).

Emissions Trading: A market mechanism that allows emitters (countries, companies or facilities) to buy emissions from or sell emissions to other emitters. Emissions trading is expected to bring down the costs of meeting emission targets by allowing those who can achieve reductions less expensively to sell excess

reductions (e.g. reductions in excess of those required under some regulation) to those for whom achieving reductions is more costly.

End-use: Pertaining to the ultimate consumption of energy or fuel.

Energy Resources: The available supply and price of fossil and alternative resources will play a huge role in estimating how much a greenhouse gas constraint will cost. In the U.S. context, natural gas supply (and thus price) is particularly important, as it is expected to be a transition fuel to a lower carbon economy.

Enhanced Greenhouse Effect: The increase in the natural greenhouse effect resulting from increases in atmospheric concentrations of GHGs due to emissions from human activities.

Evapotranspiration: The process by which water re-enters the atmosphere through evaporation from the ground and transpiration by plants.

General Circulation Model (GCM): A computer model of the basic dynamics and physics of the components of the global climate system (including the atmosphere and oceans) and their interactions which can be used to simulate climate variability and change.

Global Warming: The progressive gradual rise of the Earth's average surface temperature thought to be caused in part by increased concentrations of GHGs in the atmosphere.

Global Warming Potential (GWP): An index used to compare the relative radiative forcing of different gases without directly calculating the changes in atmospheric concentrations. GWPs are calculated as the ratio of the radiative forcing that would result from the emission of one kilogram of a greenhouse gas to that from the emission of one kilogram of carbon dioxide over a fixed period of time, such as 100 years.

Greenhouse Effect: The insulating effect of atmospheric greenhouse gases (e.g., water vapor, carbon dioxide, methane, etc.) that keeps the Earth's temperature about 60°F warmer than it would be otherwise.

Greenhouse Gases (GHG): Those gases, such as water vapor, carbon dioxide, nitrous oxide, methane, hydrofluorocarbons (HFCs), perfluorocarbons (PFCs) and sulfur hexafluoride, that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.

HGWP (High Global Warming Potential): Some industrially produced gases such as sulfur hexafluoride (SF₆), perfluorocarbons (PFCs), and hydrofluorocarbons (HFCs) have extremely high GWPs. Emissions of these gases have a much greater effect on global warming than an equal emission (by weight) of the naturally occurring gases. Most of these gases have GWPs of 1,300 - 23,900 times that of CO₂. These GWPs can be compared to the GWPs of CO₂, CH₄, and N₂O which are presently estimated to be 1, 23 and 296, respectively.

Hydrofluorocarbons (HFCs): HFCs are synthetic industrial gases, primarily used in refrigeration and semiconductor manufacturing as commercial substitutes for chlorofluorocarbons (CFCs). There are no natural sources of HFCs. The atmospheric lifetime of HFCs is decades to centuries, and they have 100-year "global warming potentials" thousands of times that of CO₂, depending on the gas. HFCs are among the six greenhouse gases to be curbed under the Kyoto Protocol.

Intergovernmental Panel on Climate Change (IPCC): The IPCC was established in 1988 by the World Meteorological Organization and the UN Environment Programme. The IPCC is responsible for providing the scientific and technical foundation for the United Nations Framework Convention on Climate Change (UNFCCC), primarily through the publication of periodic assessment reports (see "Second Assessment Report" and "Third Assessment Report").

Joint Implementation (JI): One of the three market mechanisms established by the Kyoto Protocol. Joint Implementation occurs when an Annex B country invests in an emissions reduction or sink enhancement project in another Annex B country to earn emission reduction units (ERUs).

Kyoto Mechanisms: The Kyoto Protocol creates three market-based mechanisms that have the potential to help countries reduce the cost of meeting their emissions reduction targets. These mechanisms are Joint Implementation (Article 6), the Clean Development Mechanisms (Article 12), and Emissions Trading (Article 17).

Kyoto Protocol: An international agreement adopted in December 1997 in Kyoto, Japan. The Protocol sets binding emission targets for developed countries that would reduce their emissions on average 5.2 percent below 1990 levels.

Land Use, Land-Use Change and Forestry (LULUCF): Land uses and land-use changes can act either as sinks or as emission sources. It is estimated that approximately one-fifth of global emissions result from LULUCF activities. The Kyoto Protocol allows Parties to receive emissions credit for certain LULUCF activities that reduce net emissions.

Lifecycle: The process from raw material acquisition (including exploration and production) through end-use by the consumer.

Liquefied Natural Gas (LNG): is natural gas that has been processed to remove either valuable components e.g. helium, or those impurities that could cause difficulty downstream, e.g. water, and heavy hydrocarbons and then condensed into a liquid at almost atmospheric pressure (Maximum Transport Pressure set around 25 kPa) by cooling it to approximately -163 degrees Celsius. LNG is transported by specially designed cryogenic sea vessels and cryogenic road tankers; and stored in specially designed tanks.

Liquefied Petroleum Gas (LPG): It is the term widely used to describe a family of light hydrocarbons called "gas liquids". The most prominent members of this family are propane (C₃H₈) and butane (C₄H₁₀). The term "liquefied gas" may seem a contradiction in terms since all things in nature are either a liquid, a solid or a gas. Yet, it is the unique character of LP Gas that makes it such a popular and widely used fuel. LP Gas at normal temperature and pressure is a gas. It changes to a liquid when subjected to modest pressure or cooling. In liquid form the tank pressure is about twice the pressure in a normal truck tire.

Methane (CH₄): CH₄ is among the six greenhouse gases to be curbed under the Kyoto Protocol. Atmospheric CH₄ is produced by natural processes, but there are also substantial emissions from human activities such as landfills, livestock and livestock wastes, natural gas and petroleum systems, coalmines, rice fields, and wastewater treatment. CH₄ has a relatively short atmospheric lifetime of approximately 10 years, but its 100-year GWP is currently estimated to be approximately 23 times that of CO₂.

Nitrous Oxide (N₂O): N₂O is among the six greenhouse gases to be curbed under the Kyoto Protocol. N₂O is produced by natural processes, but there are also substantial emissions from human activities such as agriculture and fossil fuel combustion. The atmospheric lifetime of N₂O is approximately 100 years, and its 100-year GWP is currently estimated to be 296 times that of CO₂.

Perfluorocarbons (PFCs): PFCs are among the six types of greenhouse gases to be curbed under the Kyoto Protocol. PFCs are synthetic industrial gases generated as a by-product of aluminum smelting and uranium enrichment. They also are used as substitutes for CFCs in the manufacture of semiconductors. There are no natural sources of PFCs. PFCs have atmospheric lifetimes of thousands to tens of thousands of years and 100-year GWPs thousands of times that of CO₂, depending on the gas.

ppm or ppb: Abbreviations for "parts per million" and "parts per billion," respectively - the units in which concentrations of greenhouse gases are commonly presented. For example, since the pre-industrial era, atmospheric concentrations of carbon dioxide have increased from 270 ppm to 370 ppm.

Radiative Forcing: The term radiative forcing refers to changes in the energy balance of the earth-atmosphere system in response to a change in factors such as greenhouse gases, land-use change, or solar radiation. The climate system inherently attempts to balance incoming (e.g., light) and outgoing (e.g. heat) radiation. Positive radiative forcings increase the temperature of the lower atmosphere, which in turn increases temperatures at the Earth's surface. Negative radiative forcings cool the lower atmosphere. Radiative forcing is most commonly measured in units of watts per square meter (W/m^2).

Reforestation: Replanting of forests on lands that have recently been harvested.

Renewable Energy: Energy obtained from sources such as geothermal, wind, photovoltaic, solar, and biomass.

Secretariat of the UN Framework Convention on Climate Change: The United Nations staff assigned the responsibility of conducting the affairs of the UNFCCC. In 1996 the Secretariat moved from Geneva, Switzerland, to Bonn, Germany.

Sequestration: Opportunities to remove atmospheric CO_2 , either through biological processes (e.g. plants and trees), or geological processes through storage of CO_2 in underground reservoirs.

Sinks: Any process, activity or mechanism that results in the net removal of greenhouse gases, aerosols, or precursors of greenhouse gases from the atmosphere

Source: Any process or activity that results in the net release of greenhouse gases, aerosols, or precursors of greenhouse gases into the atmosphere.

Stratosphere: The region of the Earth's atmosphere 10-50 km above the surface of the planet.

Substitution: The economic process of trading off inputs and consumption due to changes in prices arising from a constraint on greenhouse gas emissions. How the extremely flexible U.S. economy adapts to available substitutes and/or finds new methods of production under a greenhouse gas constraint will be critical in minimizing overall costs of reducing emissions.

Sulfate Aerosols: Sulfur-based particles derived from emissions of sulfur dioxide (SO_2) from the burning of fossil fuels (particularly coal). Sulfate aerosols reflect incoming light from the sun, shading and cooling the Earth's surface (see "radiative forcing") and thus offset some of the warming historically caused by greenhouse gases.

Sulfur Hexafluoride (SF_6): SF_6 is among the six types of greenhouse gases to be curbed under the Kyoto Protocol. SF_6 is a synthetic industrial gas largely used in heavy industry to insulate high-voltage equipment and to assist in the manufacturing of cable-cooling systems. There are no natural sources of SF_6 . SF_6 has an atmospheric lifetime of 3,200 years. Its 100-year GWP is currently estimated to be 22,200 times that of CO_2 .

Targets and Timetables: Targets refer to the emission levels or emission rates set as goals for countries, sectors, companies, or facilities. When these goals are to be reached by specified years, the years at which goals are to be met are referred to as the timetables. In the Kyoto Protocol, a target is the percent reduction from the 1990 emissions baseline that the country has agreed to. On average, developed countries agreed to reduce emissions by 5.2% below 1990 emissions during the period 2008-2012, the first commitment period.

Technological Change: How much technological change will be additionally induced by climate policies is a crucial, but not well quantified, factor in assessing the costs of long-term mitigation of greenhouse gas emissions.

Thermal expansion: Expansion of a substance as a result of the addition of heat. In the context of climate change, thermal expansion of the world's oceans in response to global warming is considered the predominant driver of current and future sea-level rise.

Trace Gas: A term used to refer to gases found in the Earth's atmosphere other than nitrogen, oxygen, argon and water vapor. When this terminology is used, carbon dioxide, methane, and nitrous oxide are classified as trace gases. Although trace gases taken together make up less than one percent of the atmosphere, carbon dioxide, methane and nitrous oxide are important in the climate system.

Troposphere: The region of the Earth's atmosphere 0-10 km above the planet's surface.

United Nations Framework Convention on Climate Change (UNFCCC): A treaty signed at the 1992 Earth Summit in Rio de Janeiro that calls for the "stabilization of greenhouse gas concentrations in the atmosphere at a level that would prevent dangerous anthropogenic interference with the climate system." The treaty includes a non-binding call for developed countries to return their emissions to 1990 levels by the year 2000. The treaty took effect in March 1994 upon ratification by more than 50 countries. The United States was the first industrialized nation to ratify the Convention.

Upstream: Pertaining to any process, or the sum total of processes, used to produce or deliver energy up to the point of consumption by the end-user. Concerns all processes used in the transformation of raw feedstock into fuel, including raw material extraction, processing, transportation, distribution, and storage.

Water Vapor (H₂O): Water vapor is the primary gas responsible for the greenhouse effect. It is believed that increases in temperature caused by anthropogenic emissions of greenhouse gases will increase the amount of water vapor in the atmosphere, resulting in additional warming (see "positive feedback").

Weather: Describes the short-term (i.e., hourly and daily) state of the atmosphere. Weather is not the same as climate.

ABOUT THE WORLD LP GAS ASSOCIATION

The World LP Gas Association is the authoritative voice of the global LP Gas industry representing all sectors of industry.

The primary aim of the association is to add value to the sector through driving premium demand for LP Gas, while also promoting compliance to good business and safety practices. It brings together private and public companies involved in one several or all activities of the industry, it develops long term partnerships with international organizations and implements projects on local and global scales.

The association was established in 1987 and granted Special Consultative Status with the United Nations Economic and Social Council in 1989

World LP Gas Association Mission

- ✓ Demonstrate the benefits of LP Gas and position it as a clean energy for a low carbon world
- ✓ Create the environment to develop and sustain LP Gas markets
- ✓ Identify and stimulate innovation
- ✓ Promote compliancy with health, safety and environment standards and good business practices
- ✓ Facilitate and drive communication among all stakeholders